EN

SUR-PLUS

Floors with attitude



TRUST IN EVERY STEP

TRUST IN EVERY STEP

Coretec®

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.



Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® cleaning products.



Time saving solution

Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a limited lifetime residential warranty.



Pro Core® 5 mm

The original 100% **waterproof floor,** with extra dent & impact resistance

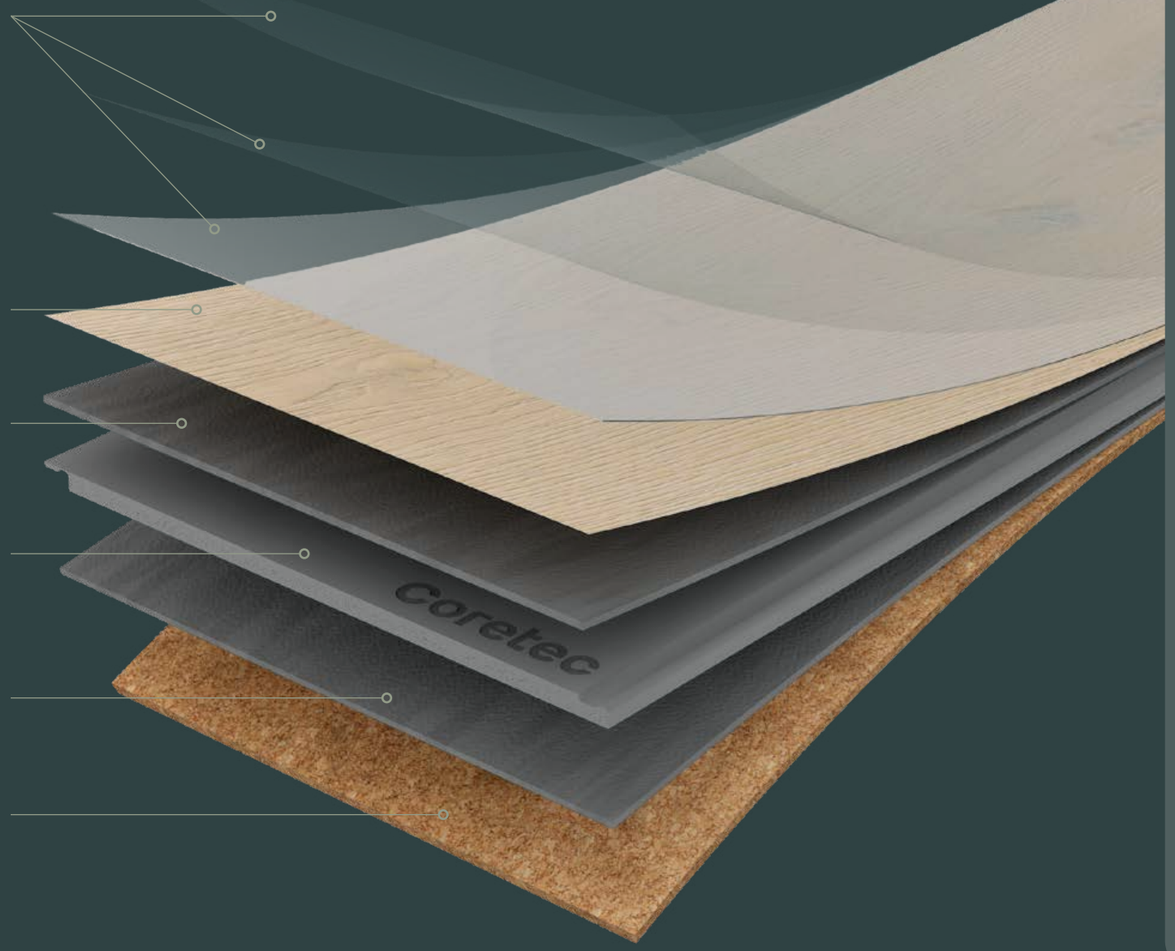

- **100% waterproof**
- **Extremely stable**
- **No acclimatisation necessary**
- **Easy to install**
- **Installation on any surface**
- **Reduces noise**
- **Wear resistant**
- **Pet proof**
- **Electrostatic performance**
- **Ideal for underfloor heating & cooling**

Floors with attitude



SurPlus brings you eccentric and **bold floors for demanding locations** such as shops, offices, and public buildings. Built to last, for high traffic residential and commercial use.

Dare to be different.

SURPLUS

Coretec

Matching your projects

1200 MB series

- 1220 × 183 mm
- 5,00 mm
- 0,55 mm
- 12 pcs
  2,6791 m²
  ± 22 kg

1200 2V Black series

- 1220 × 127 mm
- 5,00 mm
- 0,55 mm
- 14 pcs
  2,1692 m²
  ± 18 kg





1200 2V Black series

Navytec 47

VV839 04047 368

1220 × 127 × 5 mm

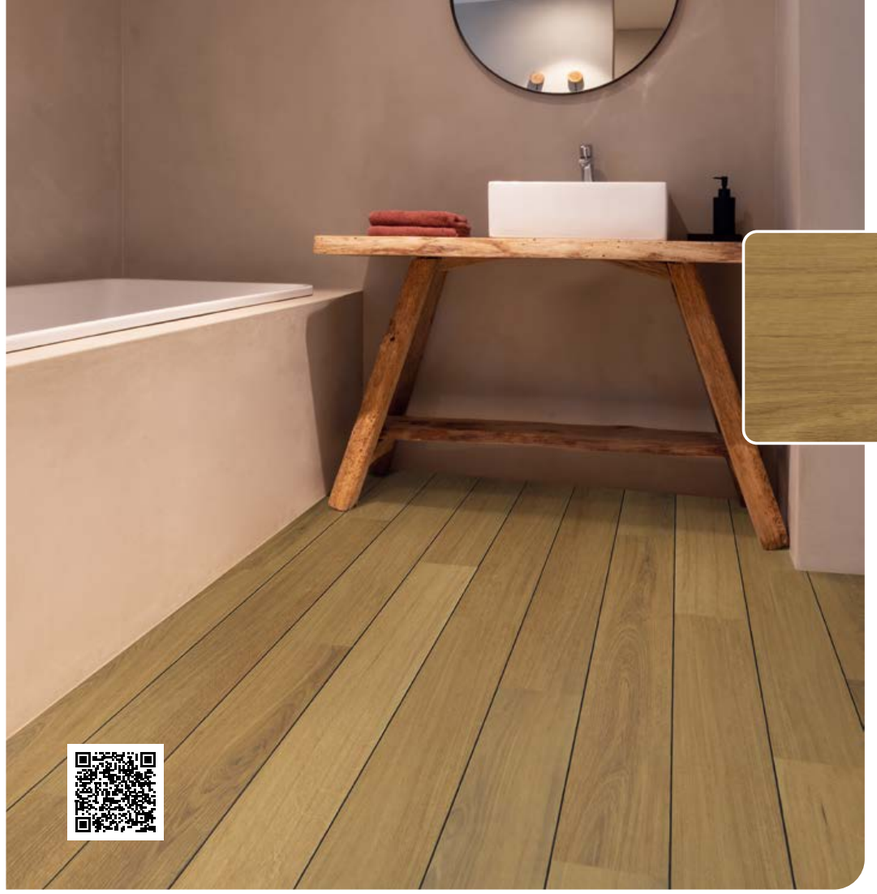



1200 MB series

Navytec 83

VV839 04083 368

1220 × 127 × 5 mm



1200 MB series

Noble Oak 55

VV838 03955 368

1220 × 183 × 5 mm



Plinth 70MSS 03955 368


Noble Oak 14 VV838 03914 368



1200 MB series

Graphic 97

VV838 03897 368
1220 × 183 × 5 mm





1200 MB series

Graphic 93

VV838 03893 368
1220 × 183 × 5 mm

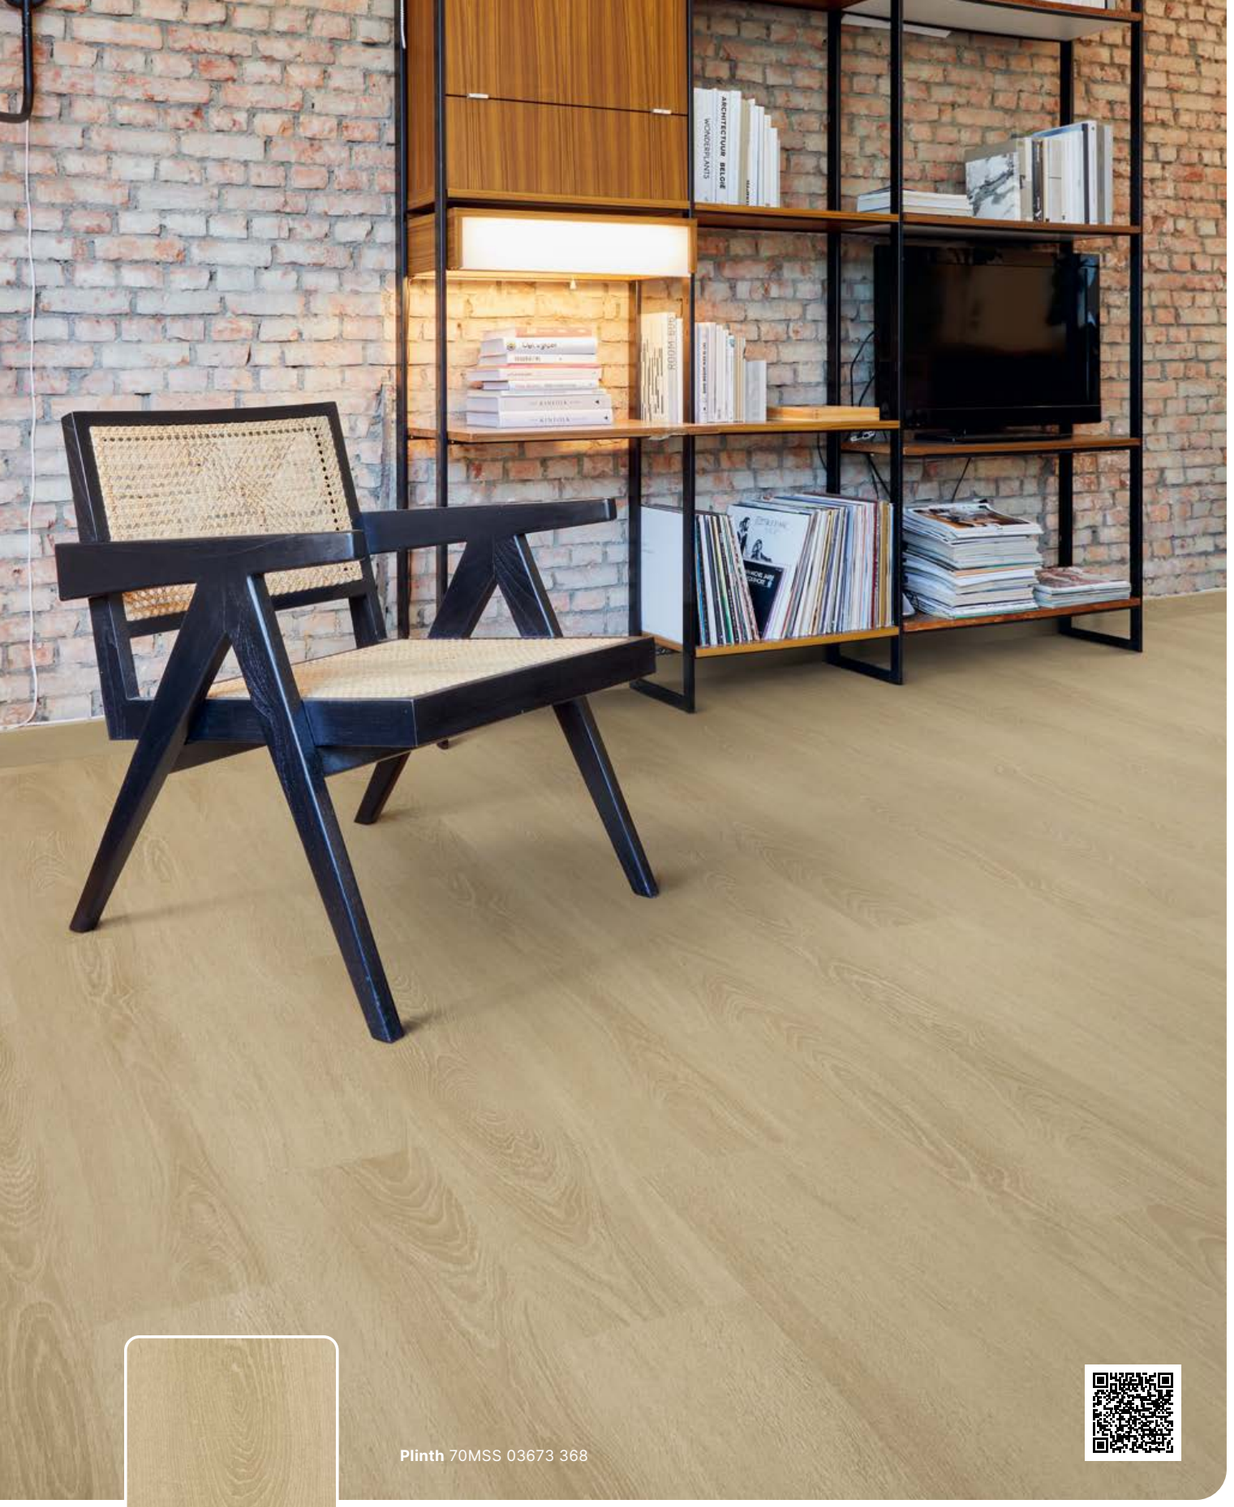

Plinth 70MSS 03673 368



1200 MB series

Elegance Oak 73

VV838 03673 368
1220 × 183 × 5 mm





1200 MB series

Elegance Oak 76

VV838 03676 368
1220 × 183 × 5 mm

1200 MB series

Elegance Oak 83

VV838 03683 368
1220 × 183 × 5 mm

Plinth 70MSS 03683 368

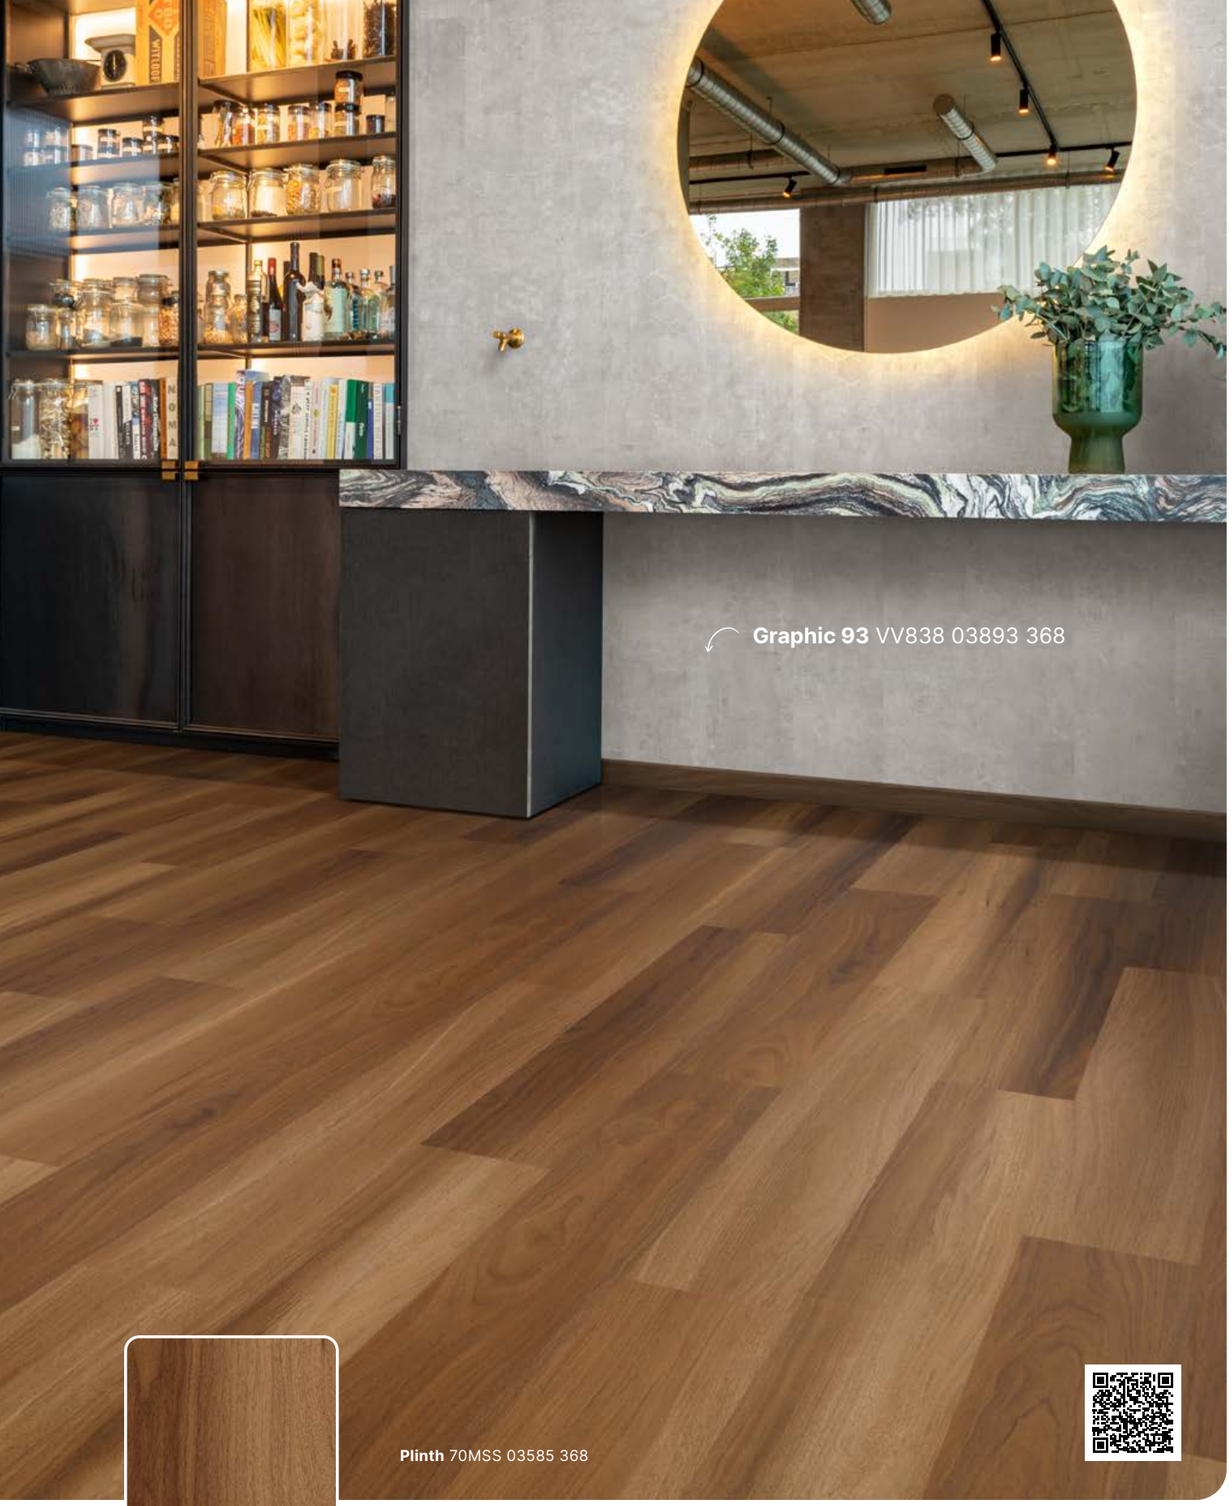

Graphic 93 VV838 03893 368



1200 MB series

Royal Walnut 85

VV838 03585 368
1220 × 183 × 5 mm

Plinth 70MSS 03585 368

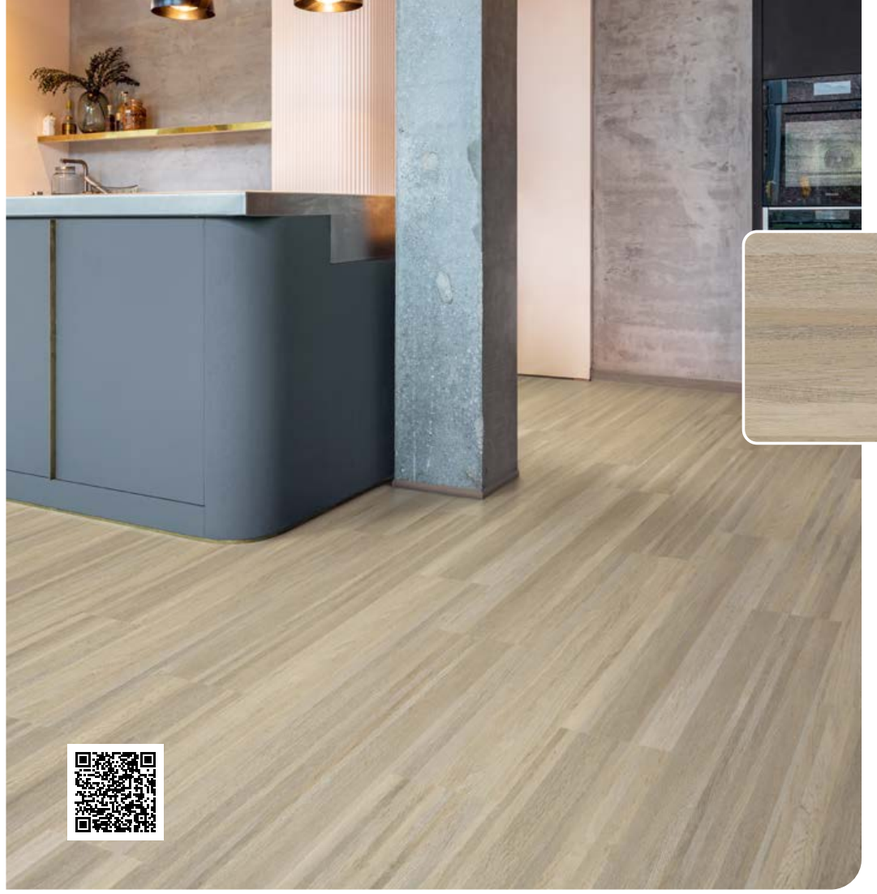



1200 MB series

Industry Oak 94

VV838 03794 368
1220 × 183 × 5 mm



1200 MB series

Industry Oak 74

VV838 03774 368
1220 × 183 × 5 mm



Plinth 70MSS 03774 368

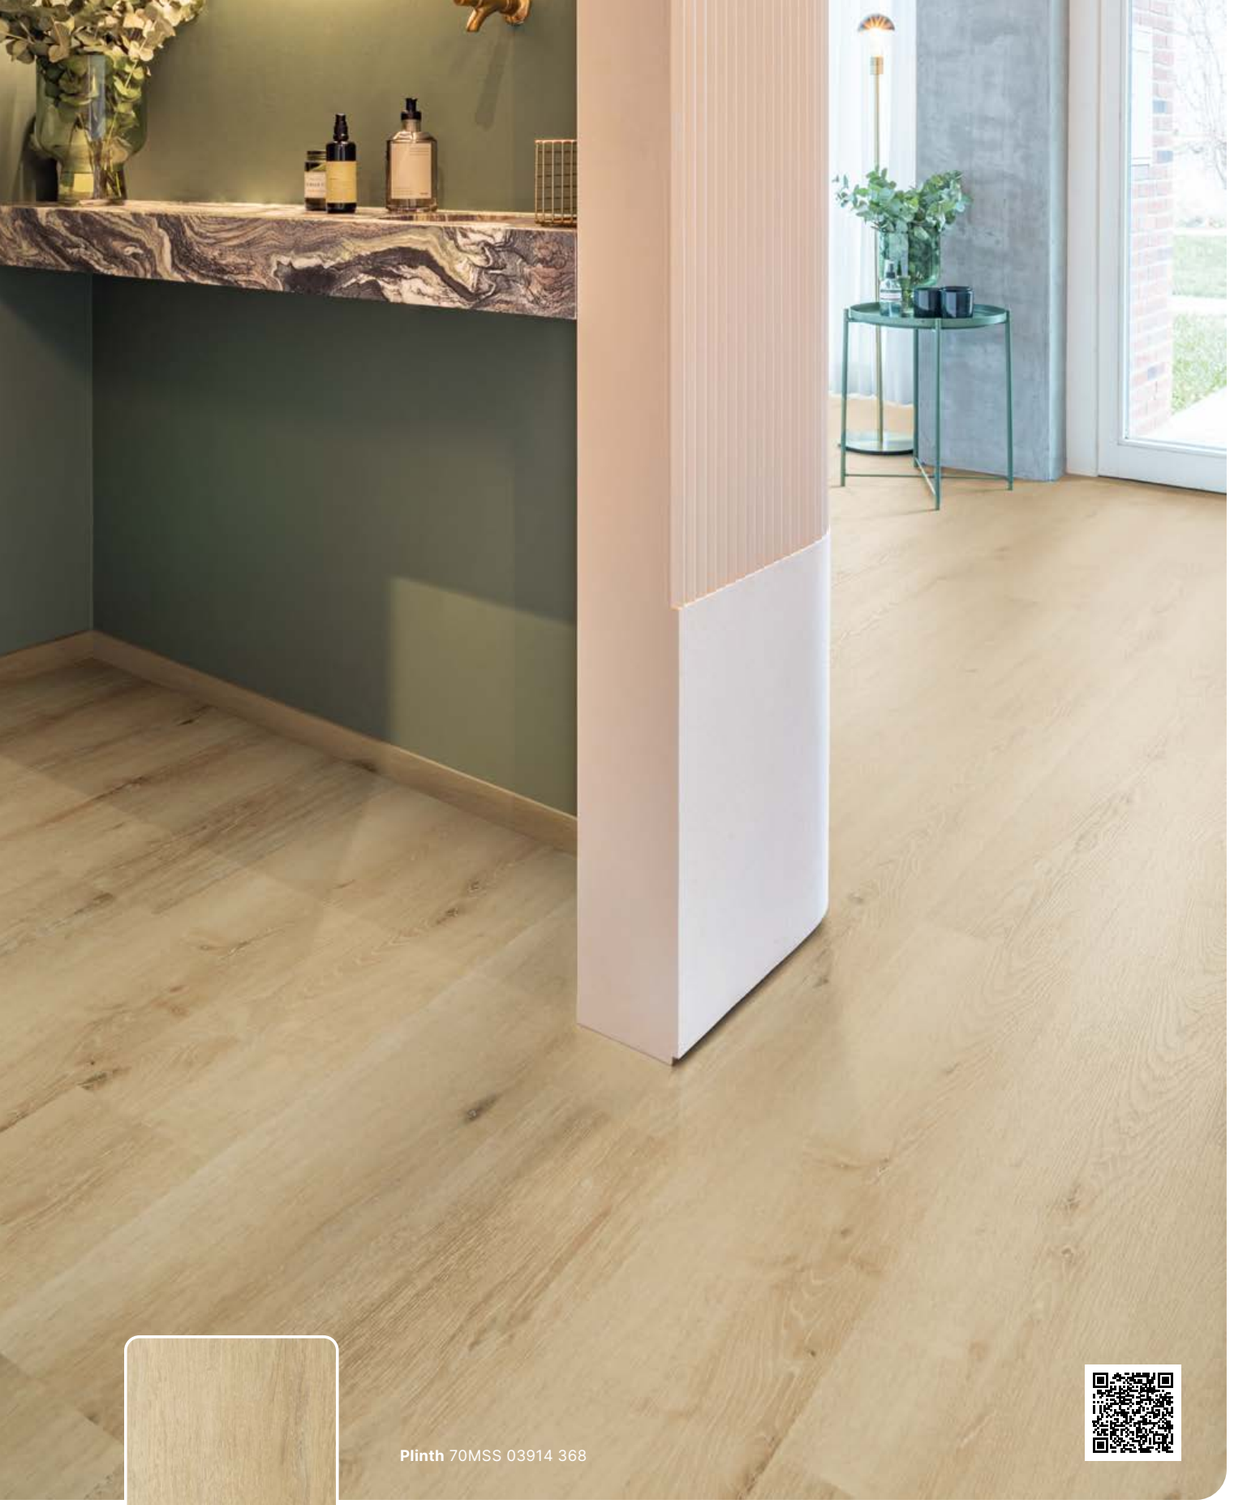

Plinth 70MSS 03914 368



1200 MB series

Noble Oak 14

VV838 03914 368

1220 × 183 × 5 mm

Accessories

Paintable skirtings



4 cm 1 cm 2.3 m
70PSK 23001 368
70 PSK2300-1



6.5 cm 1.3 cm 2.3 m
70PSK 23002 368
70 PSK2300-2



10.2 cm 1.3 cm 2.3 m
70PSK 23003 368
70 PSK2300-3



13.8 cm 1.8 cm 2 m
70PSK 20001 368
70 PSK2000-1



10 cm 2.2 cm 2 m
70PSK 20002 368
70 PSK2000-2

Discover all accessories

Matching design accessories

see page 19

. . . . = Reference number



5.8 cm 1.3 cm 2.4 m
70MSS 0 368
70 MS10 . . . .



1.9 cm 1.9 cm 2.4 m
70SCS 0 368
70 SC10 . . . .



5-7 mm 3.4 cm 2.4 m
70TMS 0 368
70 TC10 . . . .

Aluminium profiles

210 Matte black
220 Brushed aluminium
230 Champagne bronze



4-7,5 mm 2.7 cm 2 m
70ATP 210PC 368 70 ATP 2001 PC
70ATP 220PC 368 70 ATP 2002 PC
70ATP 230PC 368 70 ATP 2003 PC



4-7,5 mm 3.4 cm 2 m
70ARP 210PC 368 70 ARP 2001 PC
70ARP 220PC 368 70 ARP 2002 PC
70ARP 230PC 368 70 ARP 2003 PC



4-7,5 mm 2.1 cm 2 m
70AEP 210PC 368 70 AEP 2001 PC
70AEP 220PC 368 70 AEP 2002 PC
70AEP 230PC 368 70 AEP 2003 PC

Installation

Easy installation

Coretec® floors have the easiest install on the market.

Watch our installation video on our website www.coretecfloors.com, or by scanning the QR code.



Maintenance

Coretec® cleaning products

- Stain Remover
- Floor cleaning sheets



	Name	SKU Number		Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M² / box	± Weight box (kg)	M² / pallet
		NEW SKU	OLD SKU									
1200	**Navytec 47**	VV839 04047 368	50 RLVE 4047	1220	127	5	●	●	14	2,1692	18	151,8440
	Navytec 83	VV839 04083 368	50 RLVE 4083	1220	127	5	●	●	14	2,1692	18	151,8440
	Royal Walnut 85	VV838 03585 368	50 RLV 3585	1220	183	5			12	2,6791	22	147,3505
	Elegance Oak 73	VV838 03673 368	50 RLV 3673	1220	183	5			12	2,6791	22	147,3505
	Elegance Oak 76	VV838 03676 368	50 RLV 3676	1220	183	5			12	2,6791	22	147,3505
	Elegance Oak 83	VV838 03683 368	50 RLV 3683	1220	183	5			12	2,6791	22	147,3505
	Industry Oak 94	VV838 03794 368	50 RLV 3794	1220	183	5			12	2,6791	22	147,3505
	Industry Oak 74	VV838 03774 368	50 RLV 3774	1220	183	5			12	2,6791	22	147,3505
	Graphic 97	VV838 03897 368	50 RLV 3897	1220	183	5			12	2,6791	22	147,3505
	Graphic 93	VV838 03893 368	50 RLV 3893	1220	183	5			12	2,6791	22	147,3505
	Noble Oak 55	VV838 03955 368	50 RLV 3955	1220	183	5			12	2,6791	22	147,3505
	Noble Oak 14	VV838 03914 368	50 RLV 3914	1220	183	5			12	2,6791	22	147,3505





Modern

2400 × 58 × 13 mm
13 pieces/box
± box weight : 24 kg

Name	SKU Number	
	NEW SKU	OLD SKU
Navytec 47	70MSS 04047 368	70 MS10 4047
Navytec 83	70MSS 04083 368	70 MS10 4083
Royal Walnut 85	70MSS 03585 368	70 MS10 3585
Elegance Oak 73	70MSS 03673 368	70 MS10 3673
Elegance Oak 76	70MSS 03676 368	70 MS10 3676
Elegance Oak 83	70MSS 03683 368	70 MS10 3683
Industry Oak 94	70MSS 03794 368	70 MS10 3794
Industry Oak 74	70MSS 03774 368	70 MS10 3774
Graphic 97	70MSS 03897 368	70 MS10 3897
Graphic 93	70MSS 03893 368	70 MS10 3893
Noble Oak 55	70MSS 03955 368	70 MS10 3955
Noble Oak 14	70MSS 03914 368	70 MS10 3914



Scotia

2400 × 19 × 19 mm
80 pieces/box
± box weight : 45 kg

Name	SKU Number	
	NEW SKU	OLD SKU
Navytec 47	70SCS 04047 368	70 SC10 4047
Navytec 83	70SCS 04083 368	70 SC10 4083
Royal Walnut 85	70SCS 03585 368	70 SC10 3585
Elegance Oak 73	70SCS 03673 368	70 SC10 3673
Elegance Oak 76	70SCS 03676 368	70 SC10 3676
Elegance Oak 83	70SCS 03683 368	70 SC10 3683
Industry Oak 94	70SCS 03794 368	70 SC10 3794
Industry Oak 74	70SCS 03774 368	70 SC10 3774
Graphic 97	70SCS 03897 368	70 SC10 3897
Graphic 93	70SCS 03893 368	70 SC10 3893
Noble Oak 55	70SCS 03955 368	70 SC10 3955
Noble Oak 14	70SCS 03914 368	70 SC10 3914



T-Profile

2400 × 34 × 5-7 mm
54 pieces/box
± box weight : 23 kg

Name	SKU Number	
	NEW SKU	OLD SKU
Navytec 47	70TMS 04047 368	70 TA10 4047
Navytec 83	70TMS 04083 368	70 TA10 4083
Royal Walnut 85	70TMS 03585 368	70 TA10 3585
Elegance Oak 73	70TMS 03673 368	70 TA10 3673
Elegance Oak 76	70TMS 03676 368	70 TA10 3676
Elegance Oak 83	70TMS 03683 368	70 TA10 3683
Industry Oak 94	70TMS 03794 368	70 TA10 3794
Industry Oak 74	70TMS 03774 368	70 TA10 3774
Graphic 97	70TMS 03897 368	70 TA10 3897
Graphic 93	70TMS 03893 368	70 TA10 3893
Noble Oak 55	70TMS 03955 368	70 TA10 3955
Noble Oak 14	70TMS 03914 368	70 TA10 3914

Technical specifications (IT - ES - PT)

LEVEL OF USE
Classe d'uso / Clasificación de uso / Classe de utilização
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS
Fantasie geometriche / Características geométricas / Características geométricas
Conform (EN 17539)

WEAR RESISTANCE
Resistenza all'usura / Resistencia al desgaste / Resistência ao desgaste
Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE
Resistenza alle sedie con ruote / Resistencia a sillas con ruedas / Resistência a cadeira de rodas
Pass 25000 cycles (ISO 4918)

EFFECT OF FURNITURE LEG
Effeto furniture leg / Efecto de la pata de un mueble / Efeito da perna do móvel
No visible change (EN 16581)

RESIDUAL INDENTATION
Indentazione residua certificata / Huella residual / Recuo Residual
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING
Resistenza alle macchie / Resistencia al manchado / Resistência a manchas
5 (no visible change) (EN 438-2)

LOCKING STRENGTH
Chiusura perfetta con sistema a click / Resistencia a la tracción / Força de encaixe
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY
Stabilità dimensionale / Estabilidad dimensional / Estabilidade dimensional
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT
Resistenza alla luce / Solidez del color a luz artificial / Resistência da cor à luz
> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION
Isolamento acustico / Aislamiento acústico / Isolamento acústico
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS
Classe Formaldeide / Emisión formaldehído / Classificação formaldeído
E1 (EN 717-1)

FIRE CLASSIFICATION
Classe di resistenza al fuoco / Resistencia al fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

SLIP RESISTANCE
Coefficiente dinamico di attrito / Coeficiente de fricción / Coeficiente de atrito
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING
Riscaldamento a pavimento / Calefacción por suelo radiante / Aquecimento por piso radiante
Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE
Performance elettrostatica / Rendimiento antiestático / Acumulação de cargas eletrostáticas
≤ 2 kV (EN 1815)

THERMAL RESISTANCE
Resistenza al calore / Aislamiento térmico / Isolamento térmico
0.0318 m^2-K/W (EN 12667)

Technical specifications (FI - SV - NO - DK)

LEVEL OF USE
Käyttöluokka / Klassificering användningsområde / Bruksklasse / Anvendelsesgrad
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS
Geometriset ominaisuudet / Geometrisk karakteristik / Geometriske kjennetegn / Geometriske egenskaber
Conform (EN 17539)

WEAR RESISTANCE
Kulutuksenkesto / Slitstyrka / Slitestyrke / Slidstyrke
Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE
Pyörällisen toimistotuolin kesto / Tålighet mot rullhjul / Motstandsdyktighet / Modstandsdygtighed over for hjulstol
Pass 25000 cycles (ISO 4918)

EFFECT OF FURNITURE LEG
Huonekalun jalkojen kesto / Verkan från möbelben / Effekt møbelbein / Virkning af møbelben
No visible change (EN 16581)

RESIDUAL INDENTATION
Jäännöspainuma / Beständighet mot intrycksmärken / Motstandsdyktighet mot trykkmerker / Resterende indtryk
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING
Tahraantumisenkesto / Fläckbeständighet /Motstandsdyktighet mot flekker / Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

LOCKING STRENGTH
Lukituksen vahvuus / Låsningsstyrka / Låsestabilitet / Låsningsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY
Mittavakaus / Dimensionsstabilitet vid värmepåverkan / Formstabilitet / Dimensionel stabilitet
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT
Valonkesto / Färghärdighet / Lysfasthet / Låsningsstyrke
> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION
Askeläänen parannusarvo / Ljudisolering /Akustisk isolasjon (lydisolering) / Reduktion af stødlyd
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS
Formaldehydiluokka / Formaldehydemission /Formaldehyd emisjonsgruppe / Formaldehydemissionsklasse
E1 (EN 717-1)

FIRE CLASSIFICATION
Paloluokka / Flamsäkerhet / Brannklasse / Brandklassificering
Bfl - S1 (EN 13501)

SLIP RESISTANCE
Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING
Lattialämmitys / Värmegolv / Gulvvarme / Gulvvarme
Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE
Sähköstaattinen varautuminen / Prestanda statisk elektricitet / Elektrostatisk ytelse (antistatisk) / Elektrostatisk ydeevne
≤ 5 kV (EN 1815)

THERMAL RESISTANCE
Lämmönvastus / Värmemotstånd / Varmebestandighet / Termisk modstandsdygtighed
0.066 m^2-K/W (EN 12667)

Technical specifications (SK - PL - RU - HU - CZ - LT)

LEVEL OF USE
Úroveň použitia / Klasa ścieralności / Класс использования / Európai besorolás / Úroveň použití / Atsparumo klasė
Class 23 / 33 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS
Geometrické parametre / Charakterystyka Geometryczna / геометрические характеристики / Geometriai jellemző / Rozměry / Geometrinės savybės
Conform (EN 17539)

WEAR RESISTANCE
Odolnosť voči opotrebeniu / Wytrzymałość na zużycie / износостойкость / Kopásállóság / Odolnost proti opotřebení / Atsparumas dilimui
Pass 5000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE
Odolnosť voči kolieskam na stoličke / Odporność na krzesła obrotowe z kółkami / Стойкость к креслам с роликами / Görgős szék teszt / Odolnost vůči kolečkovým židlým / Atsparumas kėdžių ratukams
Pass 25000 cycles (ISO 4918)

EFFECT OF FURNITURE LEG
Efekt z nôh nábytku / Wpływ nogi meblowej / воздействие мебельных ножек / Bútorlábhatás / Vliv nábytkové nožky / Baldų poveikis
No visible change (EN 16581)

RESIDUAL INDENTATION
Trvalá deformácia / Pozostałe wgniecenie / остаточные вмятины / Megmaradó benyomódás / Trvalá deformace / Likęs įdubimas
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING
Odolnosť voči napúšťaniu farbou / Odporność na barwienie / устойчивость к пятнообразованию / Foltállóság / Odolnost proti vzniku skvrn / Atsparumas dėmėms
5 (no visible change) (EN 438-2)

LOCKING STRENGTH
Pevnosť pripojenia / Wytrzymałość blokowania / прочность крепления / Záróerő / Pevnostzajištění / Blokavimo jėga
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY
Rozmerová stabilita / Stabilność wymiarowa / Стабильность размеров / Méretstabilitás /Rozměrová stabilita / Matmenų stabilumas
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT
Stálosť farby na svetle / Odporność koloru na światło / устойчивость окраски к свету / Színtartósság / Stálobarevnost na světle / Spalvų atsparumas šviesa
> grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION
Akustická izolácia / Izolacja akustyczna Звукоизоляция / Hangszigetelés / Akustická izolace / Garso slopinimas
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS
Formaldehydová skupina / Emisja formaldehydu / Класс эмиссии формальдегида / Formaldehyd csoport / Formaldehydová skupina / Formaldehyde group
E1 (EN 717-1)

FIRE CLASSIFICATION
Klasifikácia voči požiaru / klasyfikacja ogniowa / класс огнестойкости / Tűzállósági osztály / Požární klasifikace / Degumo klasifikacija
Bfl - S1 (EN 13501)

SLIP RESISTANCE
Protišmykovosť / Śliskość / Стойкость к скольжению / Csúszásmentes / Protiskluznost / Slidumo klasė
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING
Podlahové vykurovanie / Ogrzewanie podłogowe / Полы с подогревом / Padlófűtésre / Podlahové vykurování / Šildomos grindys
Suitable (see: Underfloor heating guidelines)

ELECTROSTATIC PERFORMANCE
Elektrostatické prevedenie / Akumulacja ładunków elektrostatycznych / Электростатичность / Elektromos feltöltődés / Elektrostatické provedení / Antistatiškumas
≤ 2 kV (EN 1815)

THERMAL RESISTANCE
Tepelná odolnosť / Odporność cieplna / термостойкость / Hőállóság / Teplotní odolnost / Terminis atsparumas
0.0318 m^2-K/W (EN 12667)



GRAPHIC 93

It’s in our core to adore nature

Our commitments

Choose me once, love me for life
We believe in a world where things last! For a lifetime, and longer. That’s good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.

Breathe healthy air
The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.

Sustainable cork underlay
Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO_2 emissions.

We can prove it
Don’t take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.

Second Life
So you’re changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.

Do your bit for forest conservation
There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.

Coretec®



Coretec® floors are that good, somebody else can re-enjoy it.

Learn how your Coretec® floor gets a second life.

We collect
your existing Coretec® floor after your request

We clean
your floor with Coretec® biological cleaning products at a business who employs people with complex barriers to work

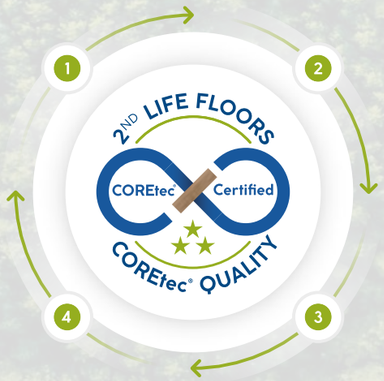

2ND life
you help us lay the foundations to a more durable world

New purpose
your Coretec® floor gets a new purpose in a non-profit organisation or other charity



Coretec®, the natural choice

Lifetime warranty residential

10 year warranty commercial

Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.
Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
Garanti (år) Garantin gäller tillverkningsfel och för tidig utslitning vid normalt användande.
Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vztahuje na vady z výroby a předčasné opotřebení v případě běžného používaní.
Garantija (Metai) Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com

US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF Shaw INDUSTRIES

06-2026 / EN-INTL - PS313 00104 368 / The flooring in this document is reproduced as accurately as achievable by printing techniques. Information in this document is subject to change. Value: € 1,50