EN

ESSENTIALS
Collection



TRUST IN EVERY STEP

TRUST IN EVERY STEP

Coretec®

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.



Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® Cleaning Kit.





100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a lifetime residential warranty.

Time saving solution

Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



The charm of nature has never been so strong



With nature as our main source of inspiration, we succeeded in creating a floor that captures the essence of your home. Whether you prefer soft earth tones or warm darker colours, our wide selection of authentic looks provides the perfect solution for every interior. Make a strong statement by relying on nature.

The Essentials collection from Coretec® comes with inviting designs, natural textures and a touch of class.



Baltimore Oak 66 - 50 LVRE 1266

Coretec®





Painted Oak 99 - 50 LVPE 1399

ESSENTIALS *Collection*


A wide range of designs
matching your interior
ESSENTIALS
Collection

Sound Core® 8 mm

Silent & strong, down to the core

At Coretec®, we're proud to offer the most complete collection of 100% waterproof floors, so you can express what makes you, you.

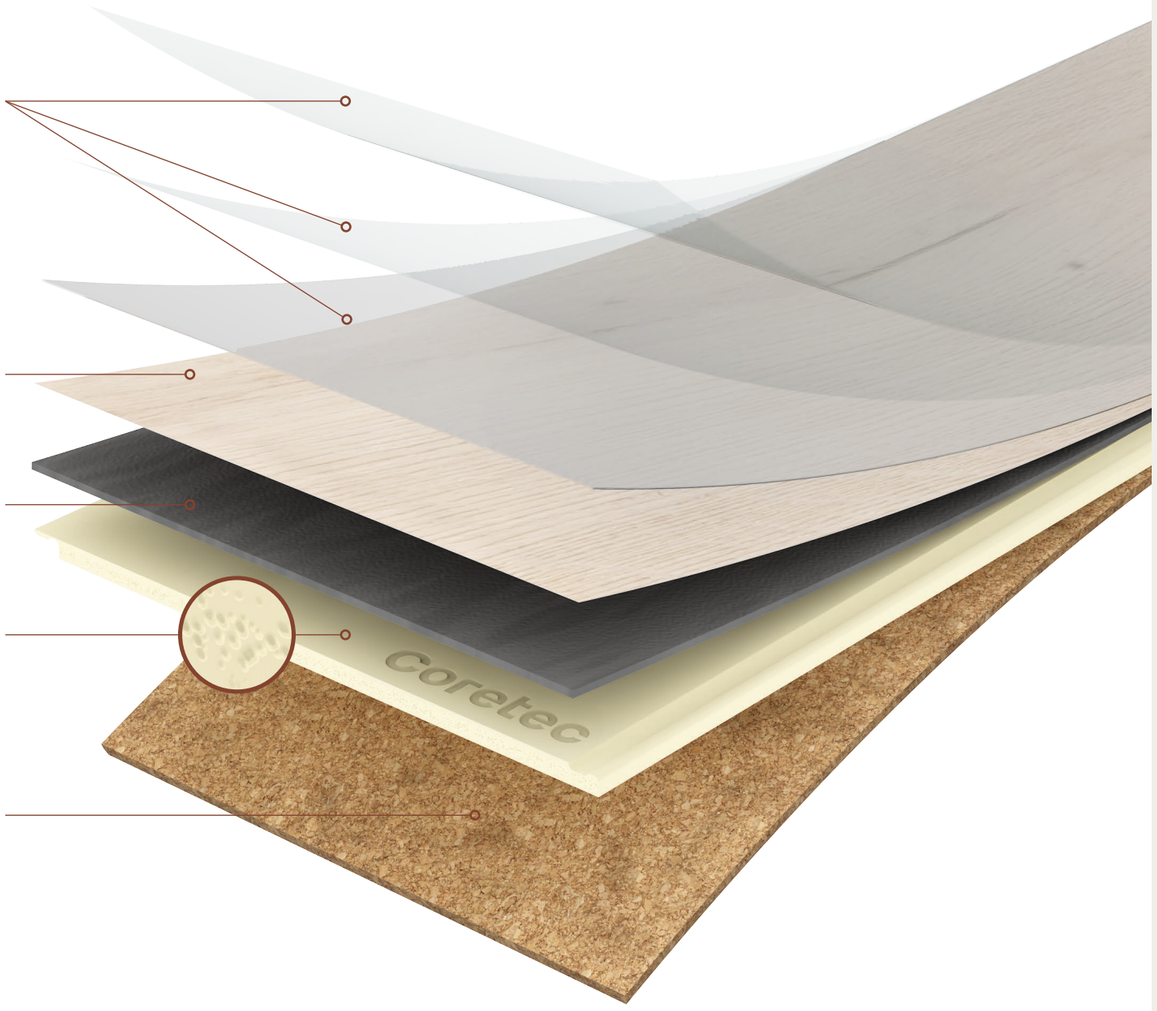

- 100% waterproof
- Extremely stable
- No acclimatisation necessary
- Easy to install
- Installation on any surface
- Reduces noise
- Wear resistant
- Pet proof
- Electrostatic performance
- Suitable for underfloor heating & cooling

ESSENTIALS
Collection







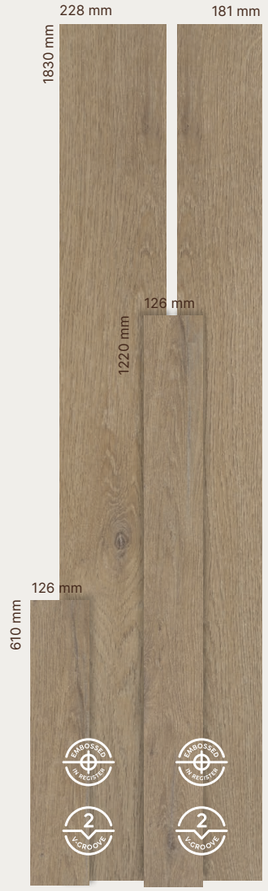





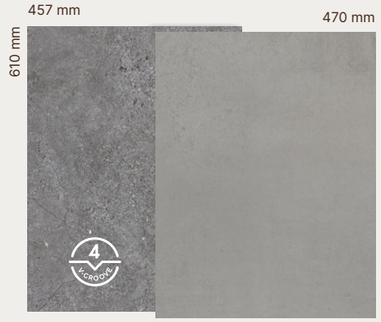

	1800 Series p.12				1500 Series p.28		1200 Series p.40	
	8 mm	8,50 mm	8 mm	8,10 mm	8,50 mm		8 mm	
	0.55 mm							
	6 pieces 2.50 m² ±21 kg	6 pieces 1.97 m² ±18 kg	6 pieces 2.50 m² ±21 kg	6 pieces 2.50 m² ±22 kg	6 pieces 2.05 m² ±20 kg	6 pieces 1.62 m² ±15 kg	10 pieces 2.20 m² ±18 kg	12 pieces 2.65 m² ±23 kg

	Multi Series p.54	Herringbone Series p.58	Tile Series p.62		
	8 mm	8 mm	8 mm		
	0.55 mm				
	10 pieces 2.91 m² ±24 kg	12 pieces 2.91 m² ±21 kg	6 pieces 2.18 m² ±19 kg	8 pieces 2.23 m² ±19 kg	9 pieces 2.58 m² ±24 kg

Coretec® features



Has bevels on the long sides



Has bevels on the long & short sides



The embossing follows the structure of the wood for a real-life touch



The charm of nature has never been so strong







Minnesota Ash 03 - 50 LVPE 2103



1800 series

1830 × 228 × 8,10 mm
1830 × 228 × 8 mm
1830 × 180 × 8,50 mm





1800 4V E series

Fremont Oak 82

50 LVRE 2282

1830 × 228 × 8 mm





1800 4V E series

Fremont Oak 93

50 LVRE 2293

1830 × 228 × 8 mm





1800 4V E series

Munster Oak 88

50 LVRE 2388

1830 × 228 × 8 mm





1800 4V E series

Munster Oak 53

50 LVRE 2353

1830 × 228 × 8 mm





1800 4V E series

Greystone Contempo Oak 34

50 LVRE 634

1830 × 180 × 8,50 mm





1800 4V E series

Timberland Rustic Pine 41

50 LVRE 641

1830 × 180 × 8,50 mm





1800 4V E series

Baltimore Oak 95

50 LVRE 1295
1830 × 180 × 8,50 mm



1800 4V E series

Baltimore Oak 77

50 LVRE 1277
1830 × 180 × 8,50 mm





1800 4V E series

Baltimore Oak 66

50 LVRE 1266
1830 × 180 × 8,50 mm







1800 4V E series

Baltimore Oak 84

50 LVRE 1284
1830 × 180 × 8,50 mm





1800 4V series

Dobra Oak 51

50 LVPE 951

1830 × 228 × 8 mm





1800 4V series

Minnesota Ash 03

50 LVPE 2103

1830 × 228 × 8 mm





1800 4V series

Tasman Oak 50

50 LVPE 950

1830 × 228 × 8 mm





1800 4V series

Warwick Oak 53

50 LVPE 953

1830 × 228 × 8 mm

1800 4V series

Ellis Oak 54

50 LVPE 954

1830 × 228 × 8 mm

MULTICOLOUR EFFECT





1800 4V series

Unity Oak 57

50 LVPE 957

1830 × 228 × 8 mm







1800 MB series

Alexandria Oak 14

50 LVP 614
1830 × 228 × 8,10 mm





1800 MB series

Highlands Oak 15

50 LVP 615
1830 × 228 × 8,10 mm



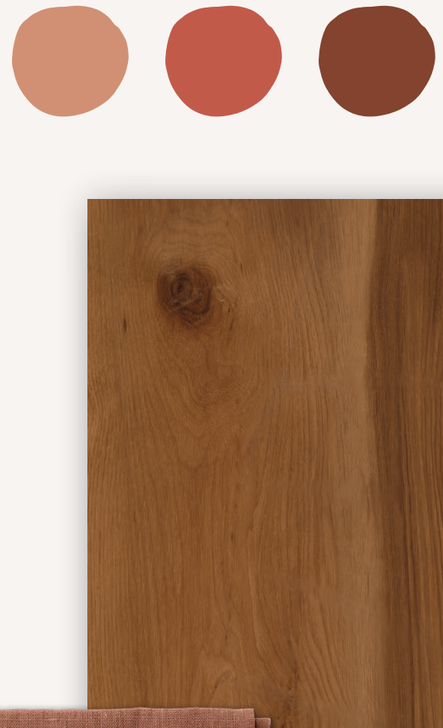







The charm of nature has never been so strong

Waterton Lakes Oak 04 - 50 LVR 9604

1500 series

1500 × 228 × 8,50 mm
1500 × 180 × 8,50 mm





1500 2V E series

Ocala Walnut 54

50 LVRE 2054

1500 × 228 × 8,50 mm



1500 2V E series

Ocala Walnut 87

50 LVRE 2087

1500 × 228 × 8,50 mm







1500 2V E series

Ocala Walnut 68

50 LVRE 2068

1500 × 228 × 8,50 mm





1500 MB E series

Jasper Oak 01

50 LVR 9601

1500 × 180 × 8,50 mm





1500 2V E series

Cleveland Oak 52

50 LVRE 1452

1500 × 228 × 8,50 mm



1500 2V E series

Cleveland Oak 52

50 LVRE 1486

1500 × 228 × 8,50 mm







1500 MB E series

Boston Oak 03

50 LVR 1903

1500 × 180 × 8,50 mm



1500 2V E series

Boston Oak 92

50 LVRE 1992

1500 × 228 × 8,50 mm







1500 MB E series

Boston Oak 78

50 LVR 1978

1500 × 180 × 8,50 mm





1500 MB series

Great Northern Oak 05

50 LVR 9605
1500 × 180 × 8,50 mm





1500 MB series

Waterton Lakes Oak 04

50 LVR 9604
1500 × 180 × 8,50 mm



1500 MB E series

Portland Oak 72

50 LVR 1872
1500 × 180 × 8,50 mm







1500 MB E series

Wind River Oak 06

50 LVR 1903
1500 × 180 × 8,50 mm





1500 2V E series

Sparwood Oak 06

50 LVR 9606
1500 × 180 × 8,50 mm



The charm of nature has never been so strong





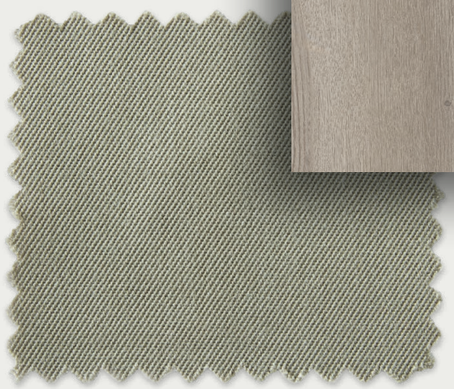



Charleston Oak 72 - 50 LVP 1172



1200 series

1220 × 180 × 8 mm
1220 × 181 × 8 mm





1200 4V series

Enchanted Oak 51

50 LVPE 751
1220 × 180 × 8 mm





1200 4V series

Rustled Oak 50

50 LVPE 750
1220 × 180 × 8 mm





1200 4V series

Painted Oak 02

50 LVPE 1302
1220 × 180 × 8 mm





1200 4V series

Painted Oak 99

50 LVPE 1399
1220 × 180 × 8 mm





1200 4V series

Cleveland Oak 62

50 LVPE 1462

1220 × 180 × 8 mm





1200 4V series

Cleveland Oak 94

50 LVPE 1494

1220 × 180 × 8 mm





1200 MB series

Charleston Oak 72

50 LVP 1172
1220 × 180 × 8 mm





1200 MB series

Charleston Oak 53

50 LVP 1153
1220 × 180 × 8 mm





1200 MB series

Charleston Oak 78

50 LVP 1178
1220 × 180 × 8 mm





1200 MB series

Blackstone Oak 07

50 LVP 707
1220 × 180 × 8 mm

MULTICOLOUR EFFECT





1200 MB series

Fallen Oak 52

50 LVP 752
1200 × 180 × 8 mm



1200 MB series

Baltimore Oak 54

50 LVP 1254
1220 × 180 × 8 mm







1200 MB series

Nantucket Oak 11

50 LVP 211
1220 × 180 × 8 mm





1200 MB series

Ivory Coast Oak 05

50 LVP 705
1220 × 180 × 8 mm





Texas Oak M54 - 50 LVREM 2454



Multi series

1 box contains planks in following dimensions:

610 × 126 × 8 mm
1220 × 126 × 8 mm
1830 × 181 × 8 mm
1830 × 228 × 8 mm

The charm of nature has never been so strong

Create
your own style

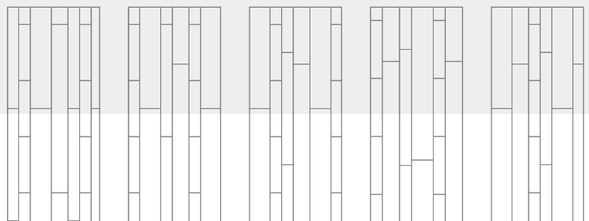





Multi 2V E series

Texas Oak M54

50 LVREM 2454

610 × 126 × 8 mm
1220 × 126 × 8 mm
1830 × 181 × 8 mm
1830 × 228 × 8 mm



Multi 2V E series

Texas Oak M71

50 LVREM 2471

610 × 126 × 8 mm
1220 × 126 × 8 mm
1830 × 181 × 8 mm
1830 × 228 × 8 mm







Multi 2V E series

Texas Oak M54

50 LVREM 2454

610 × 126 × 8 mm
1220 × 126 × 8 mm
1830 × 181 × 8 mm
1830 × 228 × 8 mm



The charm of nature has never been so strong







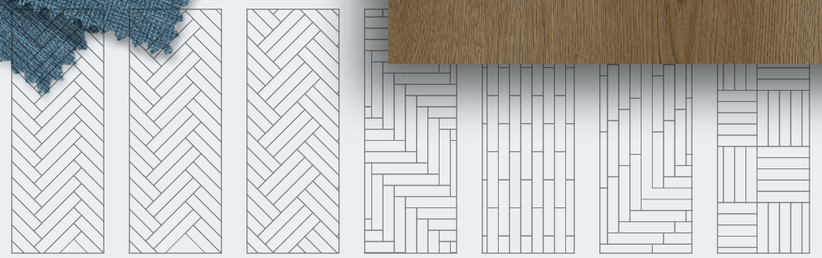



Herringbone series

912 × 228 × 8 mm

Texas Oak H54 - 50 LVRH 2454





WB MB E series

Texas Oak H71

50 LVRH 2471

912 × 228 × 8 mm





WB MB E series

Texas Oak H54

50 LVRH 2454

912 × 228 × 8 mm



WB MB E series

Texas Oak H86

50 LVRH 2486

912 × 228 × 8 mm







The charm of nature has never been so strong

Tile series

610 × 457 × 8 mm
610 × 470 × 8 mm
1205 × 302 × 8 mm

Polished Concrete 95 - 50 LVT 1695



1200 Tile MB series

Rabat 90

50 LVT 1790
1205 × 302 × 8 mm



1200 Tile MB series

Rabat 94

50 LVT 1794
1205 × 302 × 8 mm





Tile 4V series

Lyra 57

50 LVTE 1857

610 × 457 × 8 mm



Tile 4V series

Aquila 50

50 LVTE 1850

610 × 457 × 8 mm







Tile 4V series

Mensa 58

50 LVTE 1858

610 × 457 × 8 mm





Tile 4V series

Columba 53

50 LVTE 1853
610 × 457 × 8 mm





Tile 4V series

Vela 54

50 LVTE 1854
610 × 457 × 8 mm



Tile 4V series

Cosmic Copper 67

50 LVT 1567
610 × 470 × 8 mm







Tile MB series

Polished Concrete 95

50 LVT 1695
610 × 470 × 8 mm





Tile MB series

Weathered Concrete 03

50 LVT 1803
610 × 470 × 8 mm

Accessories

Paintable skirtings

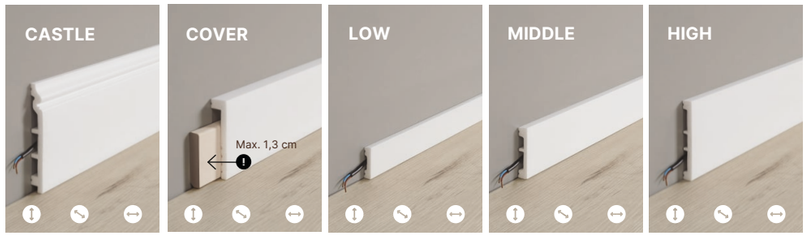

13.8 cm 1.8 cm 2 m
70 PSK2000-1

10 cm 2.2 cm 2 m
70 PSK2000-2

4 cm 1 cm 2.3 m
70 PSK2300-1

6.6 cm 1.3 cm 2.3 m
70 PSK2300-1

10,2 cm 1.3 cm 2.3 m
70 PSK2300-3

Matching design accessories

.... = matching design reference

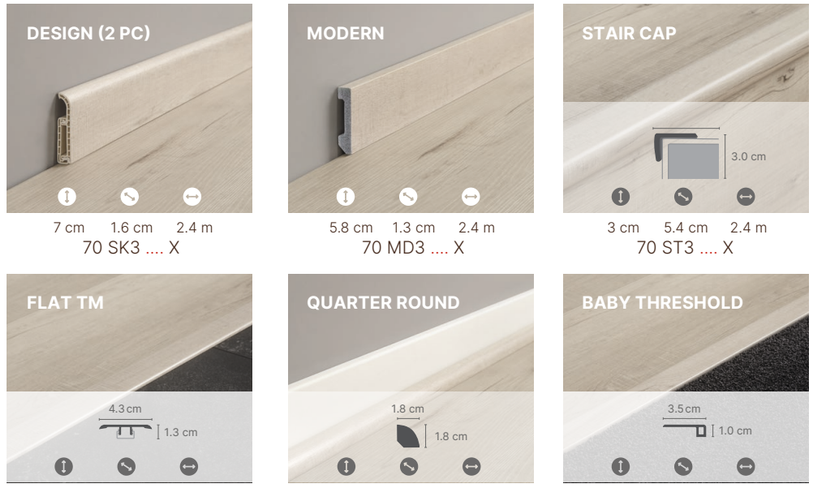

7 cm 1.6 cm 2.4 m
70 SK3 X

5.8 cm 1.3 cm 2.4 m
70 MD3 X

3 cm 5.4 cm 2.4 m
70 ST3 X

1.3 cm 4.3 cm 2.4 m
70 FT3 X

1.8 cm 1.8 cm 2.4 m
70 QR3 X

3.5 cm 1 cm 2.4 m
70 BT3 X

Aluminium profiles

2001 Matte black

2002 Brushed aluminium

2003 Champagne bronze



8-15 mm 3.4 cm 2 m
70 ATP .... SC

8-15 mm 4.4 cm 2 m
70 ARP .... SC

8-15 mm 2.6 cm 2 m
70 AEP .... SC

Installation

Easy installation

Coretec® floors have the easiest install on the market.

Watch our installation video on our website www.coretecfloors.com or scan the QR code.

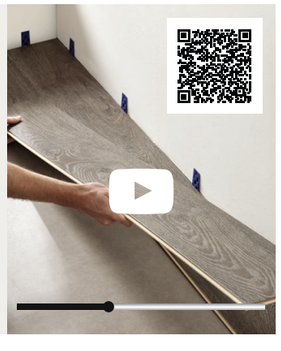

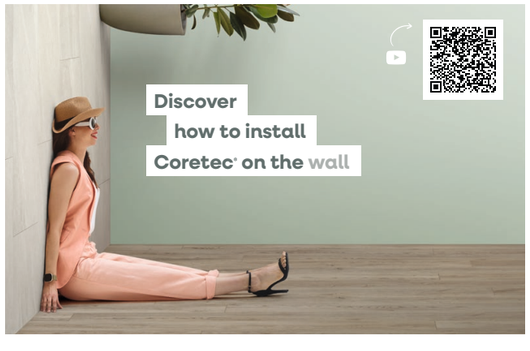

Herringbone Series variations

Mix & match your own style with our herringbone planks.

Please consult our installation guide for more information about specific requirements, such as expansion gaps and material needs.

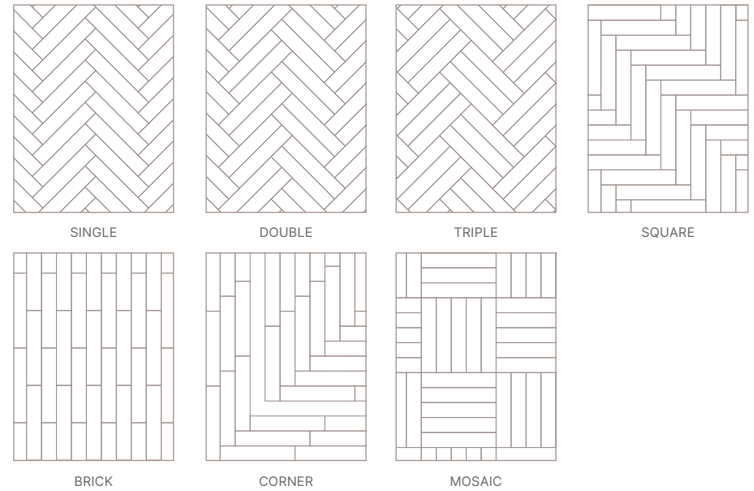

Multi Series variations

Create your own style with four different plank sizes. The layout you choose is completely up to you!

Please consult our installation guide for more information about specific requirements, such as expansion gaps and material needs.

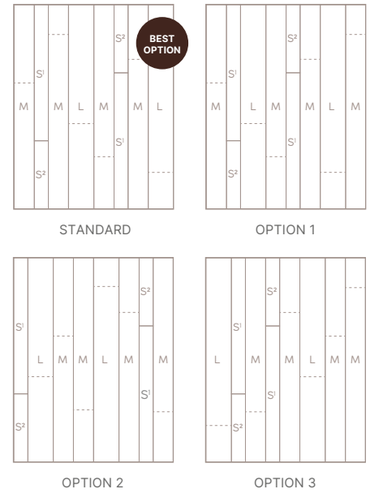

Maintenance

The Coretec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



Technical specifications (IT - SP - PT)

Level of use
Classe d'uso / Clasificación de uso / Classe de utilização
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics
Fantasie geometriche / Características geométricas / Características geométricas
Conform (EN 17539)

Wear resistance
Resistenza all'usura / Resistencia al desgaste / Resistência ao desgaste
Pass 5000 cycles (ISO 24338)

Castor chair resistance
Resistenza alle sedie con ruote / Resistencia a sillas con ruedas / Resistência a cadeira de rodas
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg
Effeto furniture leg / Efecto de la patade un mueble / Efeito da perna do móvel
No visible change (EN 16581)

Residual indentation
Indentazione residua certificata / Huella residual / Recuo residual
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Resistenza alle macchie / Resistencia al manchado / Resistência a manchas
5 (no visible change) (EN 438-2)

Locking strength
Chiusura perfetta con sistema a click / Resistencia a la tracción / Força de encaixe
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Stabilità dimensionale / Estabilidad dimensional / Estabilidade dimensional
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light
Resistenza alla luce / Solidez del color a luz artificial / Resistência da cor à luz
> grade 6 (EN ISO 105-B-02)

Impact sound reduction
Isolamento acustico / Aislamiento acústico / Isolamento acústico
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)
ΔL_{LIN} = 10 dB (ISO 10140-3 / EN 717-1)

Formaldehyde emission class
Classe Formaldeide / Emisión formaldehído / Classificação formaldeído
E1 (EN 717-1)

Fire classification
Classe di resistenza al fuoco / Resistencia al fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

Slip resistance
Coefficiente dinamico di attrito / Coeficiente de fricción / Coeficiente de atrito
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Riscaldamento a pavimento / Calefacción por suelo radiante / Aquecimento por piso radiante
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance
Performance elettrostatica / Rendimiento antiestático / Acumulação de cargas eletrostáticas
≤ 5 kV (EN 1815)

Thermal resistance
Resistenza al calore / Aislamiento térmico / Isolamento térmico
0.066 m²-K/W (EN 12667)

Technical specifications (FI - SV - NO - DK)

Level of use
Käyttöluokka / Klassificering användningsområde / Bruksklasse / Anvendelsesgrad
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics
Geometriset ominaisuudet / Geometrisk karakteristik / Geometriske kjennetegn / Geometriske egenskaber
Conform (EN 17539)

Wear resistance
Kulutuksenkesto / Slitstyrka / Slitestyrke / Slidstyrke
Pass 5000 cycles (ISO 24338)

Castor chair resistance
Pyörällisen toimistotuolin kesto / Tålighet mot rullhjul / Motstandsdyktighet / Modstandsdygtighed over for hjulstol
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg
Huonekalun jalkojen kesto / Verkan från möbelben / Effekt møbelbein / Virkning af møbelben
No visible change (EN 16581)

Residual indentation
Jäännöspainuma / Beständighet mot intrycksmärken / Motstandsdyktighet mottrykkmerker / Resterende indtryk
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Tahraantumisenkesto / Fläckbeständighet / Motstandsdyktighet mot flekker / Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

Locking strength
Lukituksen vahvuus / Låsningsstyrka / Låsestabilitet / Låsningsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Mittavakaus / Dimensionsstabilitet vid värmepåverkan / Formstabilitet / Dimensionel stabilitet
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light
Valonkesto / Färghärdighet / Lysfasthet / Låsningsstyrke
> grade 6 (EN ISO 105-B-02)

Impact sound reduction
Askeläänen parannusarvo / Ljudisolering / Akustisk isolasjon (lydisolering) / Reduktion af stødlyd
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)
ΔL_{LIN} = 10 dB (ISO 10140-3 / EN 717-1)

Formaldehyde emission class
Formaldehydiluokka / Formaldehydemission / Formaldehyd emisjonsgruppe / Formaldehydemissionsklasse
E1 (EN 717-1)

Fire classification
Paloluokka / Flamsäkerhet / Brannklasse / Brandklassificering
Bfl - S1 (EN 13501)

Slip resistance
Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Lattialämmitys / Värmegolv / Gulvvarme /Gulvvarme
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance
Sähköstaattinen varautuminen / Prestanda statisk elektricitet / Elektrostatisk ytelse (antistatisk) / Elektrostatisk ydeevne
≤ 5 kV (EN 1815)

Thermal resistance
Lämmönvastus / Värmemotstånd / Varmebestandighet / Termisk modstandsdygtighed
0.066 m²-K/W (EN 12667)

Technical specifications (SK - PL - RU - HU - CZ - LT)

Level of use
Úroveň použitia / Klasa ścieralności / Класс спользования / Európai besorolás / Úroveň použití / Atsparumo klasė

Class 23 / 33 (EN ISO 10874)

Geometrical characteristics
Geometrické parametre / Charakterystyka Geometryczna / геометрические характеристики / Geometriai jellemző / Rozměry / Geometrinės savybės

Conform (EN 17539)

Wear resistance
Odolnosť voči opotrebeniu / Wytrzymałość na zużycie / износостойкость / Kopásállóság / Odolnost proti opotřebení / Atsparumas dilimui

Pass 5000 cycles (ISO 24338)

Castor chair resistance
Odolnosť voči kolieskam na stoličke / Odporność na krzesła obrotowe z kółkami / Стойкость к креслам с роликами / Görgős szék teszt / Odolnost vůči kolečkovým židlým / Atsparumas kėdžių ratukams

Pass 25 000 cycles (ISO 4918)

Effect of furniture leg
Efekt z nôh nábytku / Wpływ nogi meblowej / воздействие мебельных ножек / Bútorlábhatás / Vliv nábytkové nožky / Baldų poveikis

No visible change (EN 16581)

Residual indentation
Trvalá deformácia / Pozostałe wgniecenie / остаточные вмятины / Megmaradó benyomódás / Trvalá deformace / Likęs įdubimas

≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Odolnosť voči napúšťaniu farbou / Odporność na barwienie / устойчивость к пятнообразованию / Foltállóság / Odolnost proti vzniku skvrn / Atsparumas dėmėms

5 (no visible change) (EN 438-2)

Locking strength
Pevnosť pripojenia / Wytrzymałość blokowania / прочность крепления / Záróerő / Pevnostzajištění / Blokavimo jėga

LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Rozmerová stabilita / Stabilność wymiarowa / Стабильность размеров / Méretstabilitás / Rozměrová stabilita / Matmenų stabilumas

Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light
Stálosť farby na svetle / Odporność koloru na światło / устойчивость окраски к свету / Színtartósság / Stálobarevnost na světle / Spalvų atsparumas šviesa

> grade 6 (EN ISO 105-B-02)

Impact sound reduction
Akustická izolácia / Izolacja akustyczna Звукоизоляция / Hangszigetelés / Akustická izolace / Garso slopinimas

ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)

ΔL_{LIN} = 10 dB (ISO 10140-3 / EN 717-1)

Formaldehyde emission class
Formaldehydová skupina / Emisja formaldehydu / Класс эмиссии формальдегида / Formaldehyd csoport / Formaldehydová skupina / Formaldehyde group

E1 (EN 717-1)

Fire classification
Klasifikácia voči požiaru / klasyfikacja ogniowa / класс огнестойкости / Tűzállósági osztály / Požární klasifikace / Degumo klasifikacija

Bfl - S1 (EN 13501)

Slip resistance
Protišmykovosť / Śliskość / Стойкость к скольжению / Csúszásmentes / Protiskluznost / Slidumo klasė

DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Podlahové vykurovanie / Ogrzewanie podłogowe / Полы с подогревом / Padlófűtésre / Podlahové vykurování / Šildomos grindys

Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance
Elektrostatické prevedenie / Akumulacja ładunków elektrostatycznych / Электростатичность / Elektromos feltöltődés / Elektrostatické provedení / Antistatiškumas

≤ 5 kV (EN 1815)

Thermal resistance
Tepelná odolnosť / Odporność cieplna / термостойкость / Hőállóság / Teplotní odolnost / Terminis atsparumas

0.066 m²-K/W (EN 12667)

Series	Name	SKU Number	Length (mm)	Width (mm)	Thickness (mm)	2 Click	4 Click	Angle Click	Pieces / box	M² / box	± Weight box (kg)	M² / pallet
1800 2V E	Fremont Oak 82	50 LVRE 2282	1830	228	8	•		•	6	2,50	21	110,00
	Fremont Oak 93	50 LVRE 2293	1830	228	8	•		•	6	2,50	21	110,00
	Munster Oak 53	50 LVRE 2353	1830	228	8	•		•	6	2,50	21	110,00
	Munster Oak 88	50 LVRE 2388	1830	228	8	•		•	6	2,50	21	110,00
1800 4V E	Greystone Contempo Oak 34	50 LVRE 634	1830	180	8,50		•	•	6	1,97	18	98,50
	Timberland Rustic Pine 41	50 LVRE 641	1830	180	8,50		•	•	6	1,97	18	98,50
	Baltimore Oak 66	50 LVRE 1266	1830	180	8,50		•	•	6	1,97	18	98,50
	Baltimore Oak 84	50 LVRE 1284	1830	180	8,50		•	•	6	1,97	18	98,50
	Baltimore Oak 77	50 LVRE 1277	1830	180	8,50		•	•	6	1,97	18	98,50
	Baltimore Oak 95	50 LVRE 1295	1830	180	8,50		•	•	6	1,97	18	98,50
1800 4V	Dobra Oak 51	50 LVPE 951	1830	228	8		•		6	2,50	21	100,00
	Tasman Oak 50	50 LVPE 950	1830	228	8		•		6	2,50	21	100,00
	Ellis Oak 54	50 LVPE 954	1830	228	8		•		6	2,50	21	100,00
	Warwick Oak 53	50 LVPE 953	1830	228	8		•		6	2,50	21	100,00
	Unity Oak 57	50 LVPE 957	1830	228	8		•		6	2,50	21	100,00
	Minnesota Ash 03	50 LVPE 2103	1830	228	8		•		6	2,50	21	100,00
1800 MB	Alexandria Oak 14	50 LVP 614	1830	228	8,10				6	2,50	21	110,00
	Highlands Oak 15	50 LVP 615	1830	228	8,10				6	2,50	21	110,00
1500 2V E	Boston Oak 92	50 LVRE 1992	1500	228	8,50	•		•	6	2,05	20	82,00
	Ocala Walnut 87	50 LVRE 2087	1500	228	8,50	•		•	6	2,05	20	82,00
	Ocala Walnut 54	50 LVRE 2054	1500	228	8,50	•		•	6	2,05	20	82,00
	Ocala Walnut 68	50 LVRE 2068	1500	228	8,50	•		•	6	2,05	20	82,00
	Cleveland Oak 86	50 LVRE 1486	1500	228	8,50	•		•	6	2,05	20	82,00
	Cleveland Oak 52	50 LVRE 1452	1500	228	8,50	•		•	6	2,05	20	82,00
1500 MB E	Jasper Oak 01	50 LVR 9601	1500	180	8,50			•	6	1,62	15	81,00
	Great Northern Oak 05	50 LVR 9605	1500	180	8,50			•	6	1,62	15	81,00
	Waterton Lakes Oak 04	50 LVR 9604	1500	180	8,50			•	6	1,62	15	81,00
	Wind River Oak 06	50 LVR 8606	1500	180	8,50			•	6	1,62	15	81,00
	Sparwood Oak 06	50 LVR 9606	1500	180	8,50			•	6	1,62	15	81,00
	Portland Oak 72	50 LVR 1872	1500	180	8,50			•	6	1,62	15	81,00
	Boston Oak 03	50 LVR 1903	1500	180	8,50			•	6	1,62	15	81,00
	Boston Oak 78	50 LVR 1978	1500	180	8,50			•	6	1,62	15	81,00
1200 4V	Rustled Oak 50	50 LVPE 750	1220	180	8		•		10	2,20	18	77,00
	Enchanted Oak 51	50 LVPE 751	1220	180	8		•		10	2,20	18	77,00
	Painted Oak 02	50 LVPE 1302	1220	180	8		•		10	2,20	18	77,00
	Painted Oak 99	50 LVPE 1399	1220	180	8		•		10	2,20	18	77,00
	Cleveland Oak 62	50 LVPE 1462	1220	180	8		•		10	2,20	18	77,00
	Cleveland Oak 94	50 LVPE 1494	1220	180	8		•		10	2,20	18	77,00
1200 MB	Ivory Coast Oak 05	50 LVP 705	1220	182	8				12	2,65	23	119,25
	Blackstone Oak 07	50 LVP 707	1220	182	8				12	2,65	23	119,25
	Nantucket Oak 11	50 LVP 211	1220	182	8				12	2,65	23	119,25
	Fallen Oak 52	50 LVP 752	1220	180	8				10	2,20	18	77,00
	Charleston Oak 72	50 LVP 1172	1220	182	8				12	2,65	23	119,25
	Charleston Oak 78	50 LVP 1178	1220	182	8				12	2,65	23	119,25
	Charleston Oak 53	50 LVP 1153	1220	182	8				12	2,65	23	119,25
	Baltimore Oak 54	50 LVP 1254	1220	182	8				12	2,65	23	119,25
WB MB E	Texas Oak H71	50 LVRH 2471	912	228	8			•	A:6 - B:6	2,50	21	80,00
	Texas Oak H86	50 LVRH 2486	912	228	8			•	A:6 - B:6	2,50	21	80,00
	Texas Oak H54	50 LVRH 2454	912	228	8			•	A:6 - B:6	2,50	21	80,00
MULTI 2V E	Texas Oak M71	50 LVREM 2471	610	126	8	•		•	2	2,62	24	125,76
			1830	181	8	•		•	4			
			1220	126	8	•		•	2			
			1830	228	8	•		•	2			
	Texas Oak M86	50 LVREM 2486	610	126	8	•		•	2	2,62	24	125,76
			1830	181	8	•		•	4			
			1220	126	8	•		•	2			
			1830	228	8	•		•	2			
	Texas Oak M54	50 LVREM 2454	610	126	8	•		•	2	2,62	24	125,76
			1830	181	8	•		•	4			
			1220	126	8	•		•	2			
			1830	228	8	•		•	2			
1200 TILE MB	Rabat 94	50 LVT 1794	1205	302	8				6	2,18	19	111,18
	Rabat 90	50 LVT 1790	1205	302	8				6	2,18	19	111,18
TILE AV	Aquila 50	50 LVTE 1850	610	457	8		•		6	2,23	19	103,20
	Lyra 57	50 LVTE 1857	610	457	8		•		6	2,23	19	103,20
	Columba 53	50 LVTE 1853	610	457	8		•		6	2,23	19	103,20
	Vela 54	50 LVTE 1854	610	457	8		•		6	2,23	19	103,20
	Mensa 58	50 LVTE 1858	610	457	8		•		6	2,23	19	103,20
TILE MB	Weathered Concrete 03	50 LVT 1803	610	470	8		•		9	2,58	24	71,36
	Cosmic Copper 67	50 LVT 1567	610	470	8				9	2,58	24	71,36
	Polished Concrete 95	50 LVT 1695	610	470	8				9	2,58	24	71,36



Texas Oak M54 50 LVREM 2454



Ocala Walnut 87 50 LVRE 2087

It’s in our core to adore nature

Our commitments

Choose me once, love me for life
We believe in a world where things last! For a lifetime, and longer. That’s good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.

Breathe healthy air
The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.

Sustainable cork underlay
Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO_2 emissions.

We can prove it
Don’t take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.

Second Life
So you’re changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.

Do your bit for forest conservation
There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.

Coretec®



Coretec® floors are that good, somebody else can re-enjoy it.

Learn how your Coretec® floor gets a second life.

We collect
your existing Coretec® floor after your request

We clean
your floor with Coretec® biological cleaning products at a business who employs people with complex barriers to work

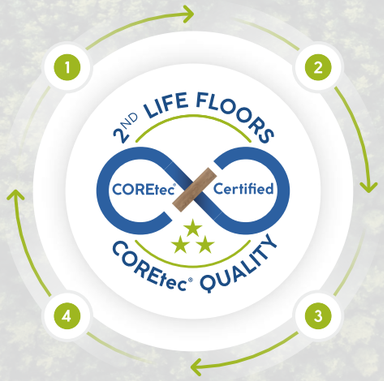

2ND life
you help us lay the foundations to a more durable world

New purpose
your Coretec® floor gets a new purpose in a non-profit organisation or other charity



Lifetime warranty residential

10 year warranty commercial

Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.
Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
Garanti (år) Garantin gäller tillverkningsfel och för tidig utslitning vid normalt användande.
Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vztahuje na vady z výroby a předčasné opotřebení v případě běžného používaní.
Garantija (Metai) Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis

Coretec

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com

US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF Shaw INDUSTRIES

04-2025 / EN-INTL - 21 BROC 001-4 / The flooring in this document is reproduced as accurately as achievable by printing techniques. Information in this document is subject to change. Value: € 3,20