EN

XL-END



TRUST IN EVERY STEP

TRUST IN EVERY STEP

Coretec®



Your Coretec® floor, made with care

We have a passion for providing a wide selection of authentic natural looks, so you can express what makes you, you. Persistent in product innovation – including micro-beveled edges, enhanced painted bevels & Embossed in Register technology – we create the most appealing designs & textures available.

When choosing a floor from this collection, you choose for a warm atmosphere and a powerful look. The exceptionally long planks are no less than **2.10 meters long and 15 mm thick**. Thanks to the extra thick wear layer of 0.8 mm, these classy floors score excellently in terms of wear and impact resistance.

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.

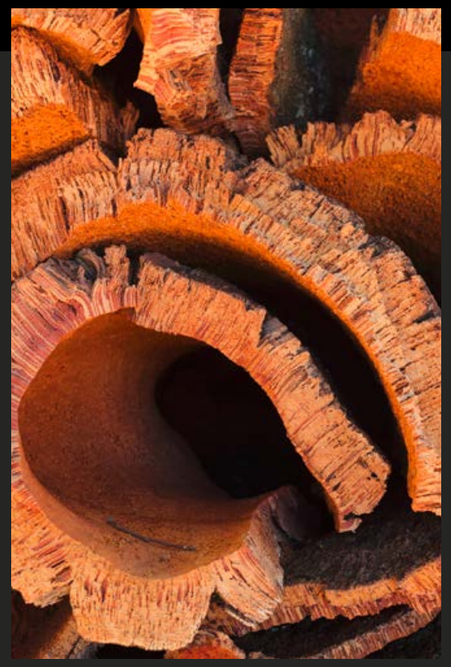

Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® Cleaning Kit.



Time saving solution

Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a lifetime residential warranty.

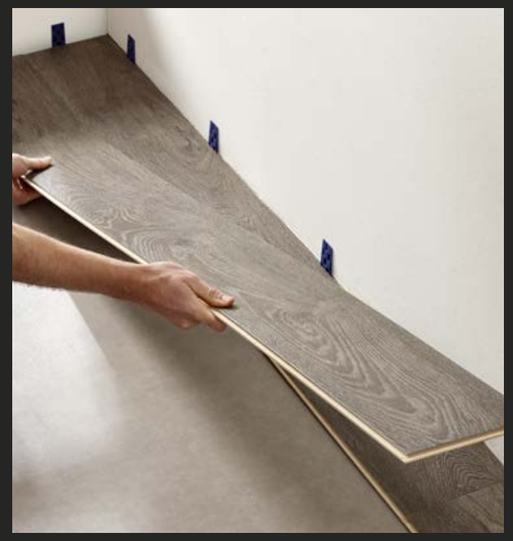

Sound Core® 15 mm

Extra long, Extra strong

Extra long plank
2100 × 305 mm
2100 × 228 mm

0,80 mm
High performance wear layers
best in class wear resistance

Embossed in register
the embossing follows the structure of the wood for a real-life touch

2v-groove
our floors have bevels on the long sides of the plank

Comfort
warm & quiet underfoot



Sustainable
extra thick 3 mm attached cork underlayment

Sound Core®
core with excellent sound reduction

Balancing layer
extra stability

15 mm
Total thickness

Best in class wear resistance

100% waterproof

Easy to install

Electrostatic performance

Extremely stable

Reduces noise

No acclimatisation necessary

Pet proof

Installation on any surface

Ideal for underfloor heating & cooling

An exclusive waterproof selection


p. 10

Kylemore
VV006 04355 368


p. 12

Chambord
VV006 04358 368


p. 16

Saumur
VV006 04384 368


p. 18

Monte
VV809 05188 368


p. 22

Alhambra
VV809 05183 368


p. 24

Bled
VV809 05152 368


p. 26

Kantara
VV809 02515 368


p. 28

Egmont
VV809 02553 368


p. 32

Belvoir
VV809 02594 368


p. 34

Montclair
VV809 02557 368


p. 38

Windsor
VV809 02683 368


p. 40

Fonteneau
VV809 02686 368


p. 42

Chantilly
VV809 02599 368



Kylemore

VV006 04355 368

2100 × 305 × 15 mm

XL-END





Chambord

VV006 04358 368

2100 × 305 × 15 mm

XL-END

Chambord - VV006 04358 368



Saumur

VV006 04384 368

2100 × 305 × 15 mm

XL-END







Monte

VV809 05188 368

2100 × 228 × 15 mm

XL-END



Monte - VV809 05188 368



Alhambra

VV809 05183 368

2100 × 228 × 15 mm

XL-END



Bled

VV809 05152 368

2100 × 228 × 15 mm

XL-END



Kantara

VV809 02515 368

2100 × 228 × 15 mm

XL-END





Egmont

VV809 02553 368

2100 × 228 × 15 mm

XL-END

Egmont - VV809 02553 368



Belvoir

VV809 02594 368

2100 × 228 × 15 mm

XL-END





Montclair

VV809 02557 368

2100 × 228 × 15 mm

XL-END

Montclair - VV809 02557 368



Windsor

VV809 02683 368

2100 × 228 × 15 mm

XL-END





Fonteneau

VV809 02686 368

2100 × 228 × 15 mm

XL-END



Chantilly

VV809 02599 368

2100 × 228 × 15 mm

XL-END

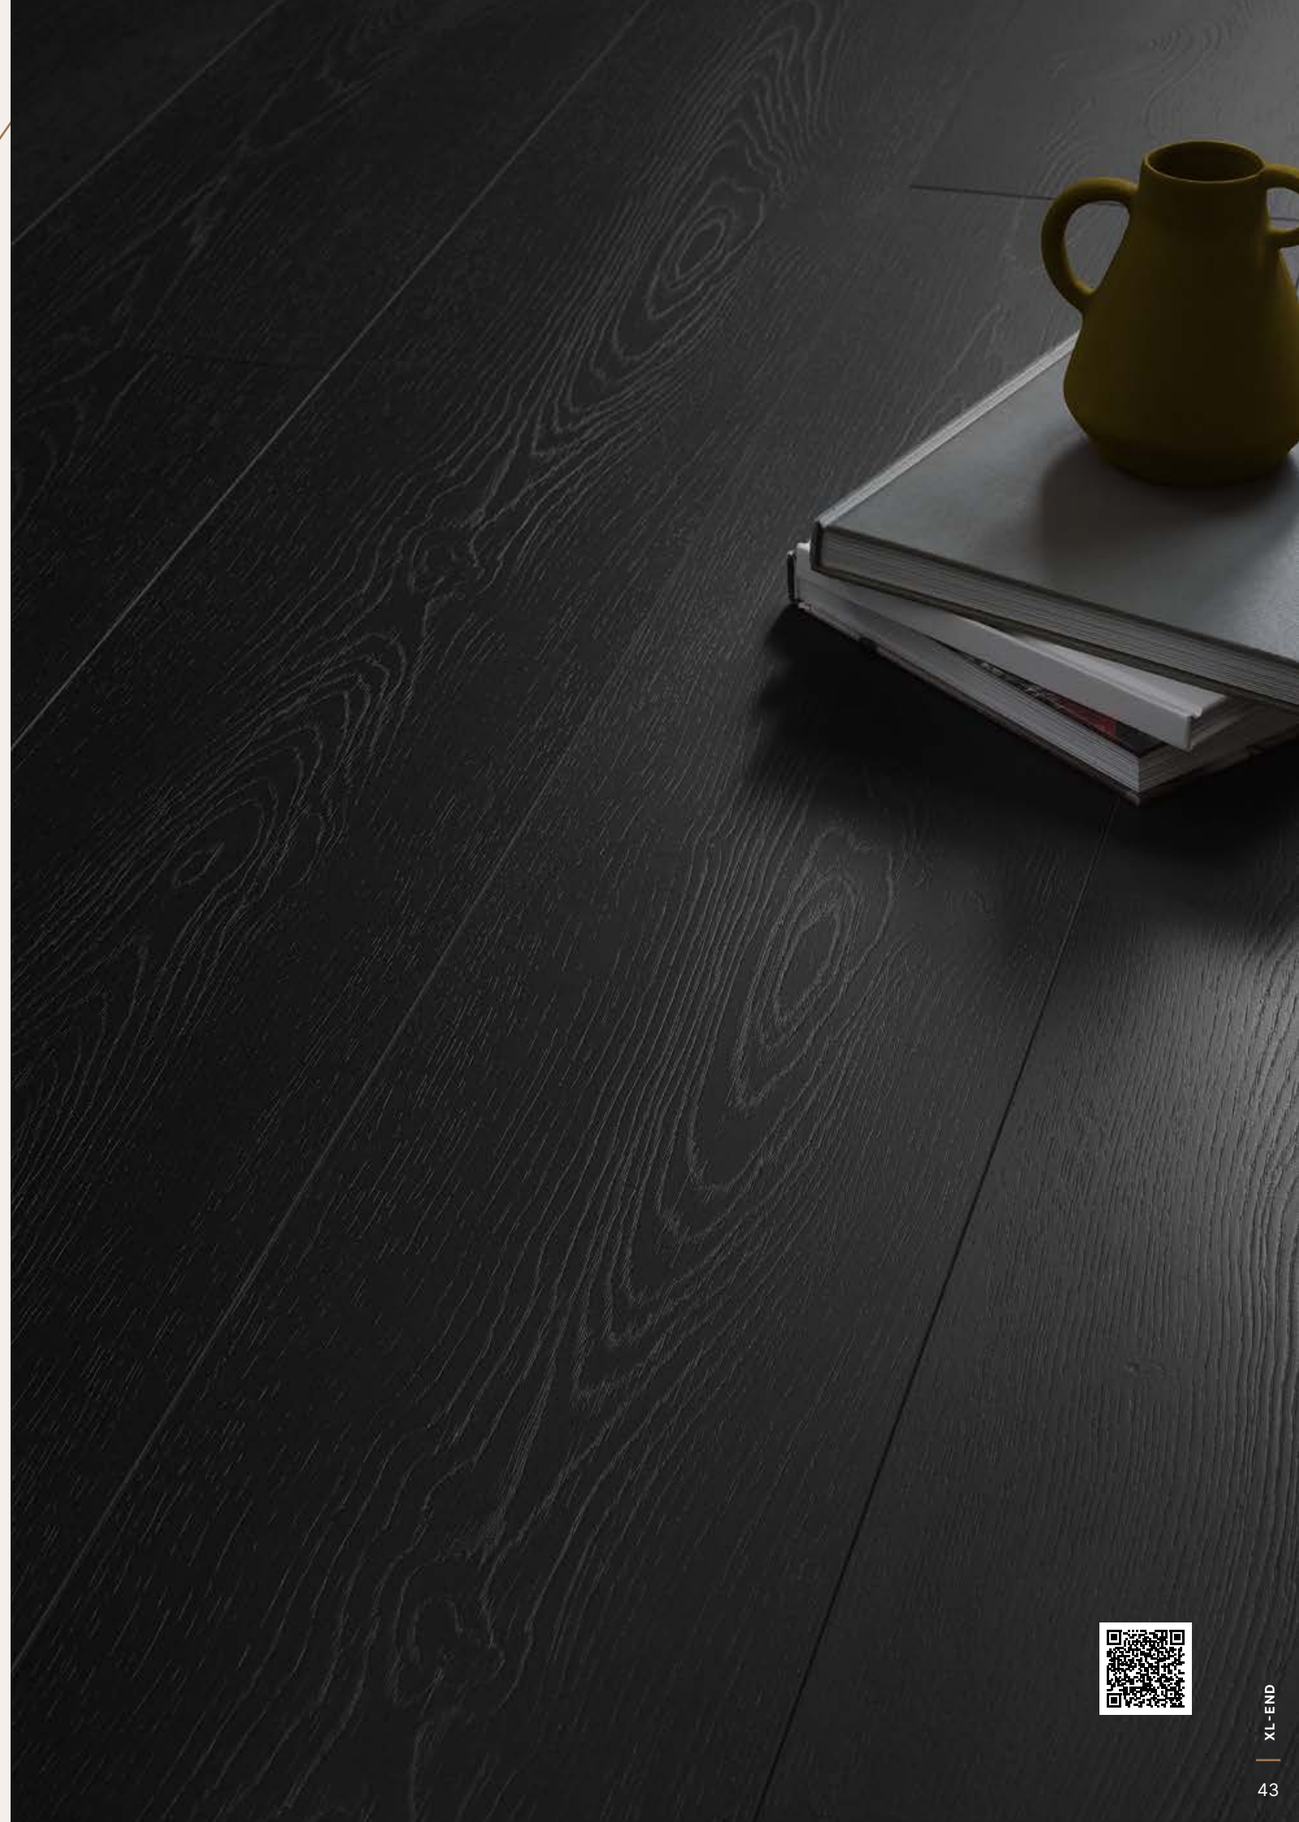

Chantilly - VV809 02599 368

Accessories

Paintable skirtings



4 cm 1 cm 2.3 m
70PSK 23001 368
70 PSK2300-1



6.6 cm 1.3 cm 2.3 m
70PSK 23002 368
70 PSK2300-2



10.2 cm 1.3 cm 2.3 m
70PSK 23003 368
70 PSK2300-3



13.8 cm 1.8 cm 2 m
70PSK 20001 368
70 PSK2000-1



10 cm 2.2 cm 2 m
70PSK 20002 368
70 PSK2000-2

Discover all accessories

Matching design accessories

see page 47

. . . . = Reference number



5.8 cm 1.3 cm 2.4 m
70MSX 0 368
70 MS08 . . . .



1.9 cm 1.9 cm 2.4 m
70SCX 0 368
70 SC08 . . . .



8-15 mm 3.4 cm 2.4 m
70TMX 0 368
70 TC08 . . . .

Aluminium profiles

210 Matte black
220 Brushed aluminium
230 Champagne bronze



8-15 mm 3.4 cm 2 m
70ATP 210SC 368 70 ATP 2001 SC
70ATP 220SC 368 70 ATP 2002 SC
70ATP 230SC 368 70 ATP 2003 SC



8-15 mm 4.4 cm 2 m
70ARP 210SC 368 70 ARP 2001 SC
70ARP 220SC 368 70 ARP 2002 SC
70ARP 230SC 368 70 ARP 2003 SC



8-15 mm 2.6 cm 2 m
70AEP 210SC 368 70 AEP 2001 SC
70AEP 220SC 368 70 AEP 2002 SC
70AEP 230SC 368 70 AEP 2003 SC

Installation

Easy installation

Coretec® floors have the easiest install on the market.

Watch our installation video on our website www.coretecfloors.com or scan the QR code.



Maintenance

Coretec® cleaning products

- Stain Remover
- Floor cleaning strips



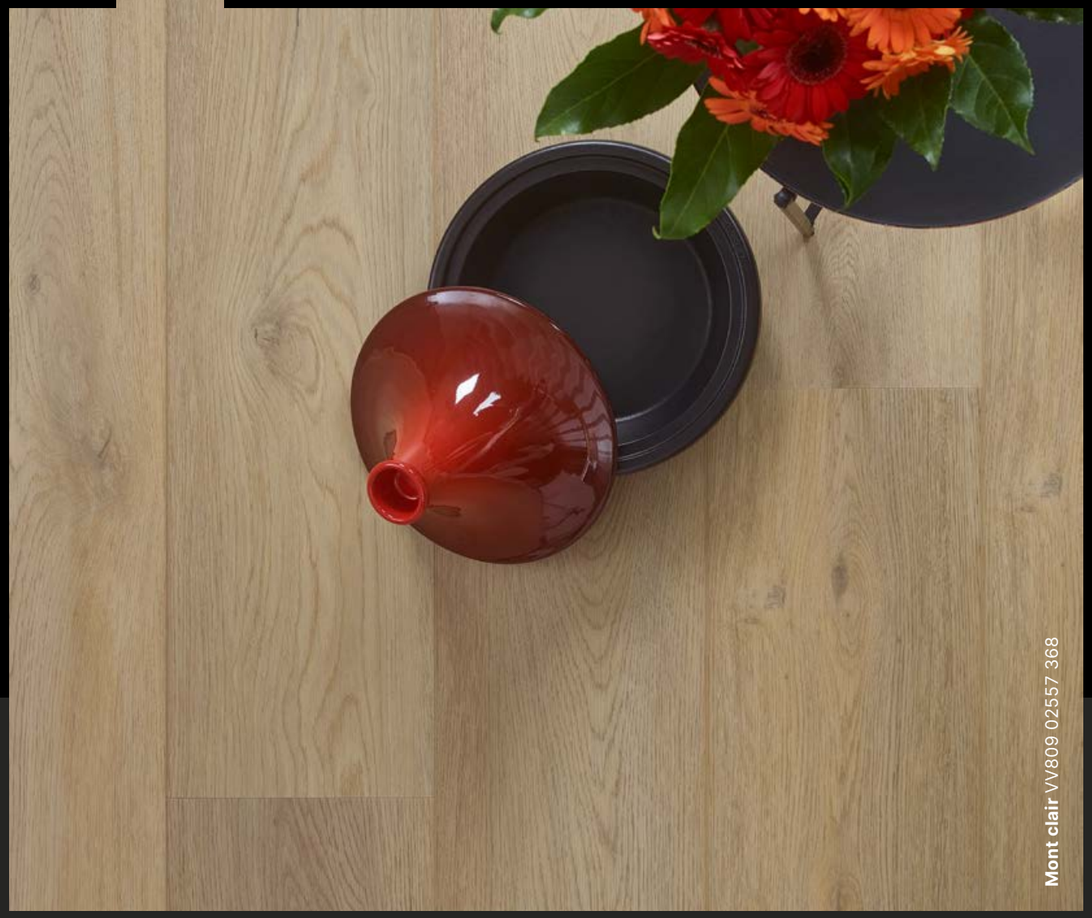

Mont clair VV809 02557 368



Saumur VV006 04384 368

Series	Name	SKU Number		Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M² / box	± Weight box (kg)	M² / pallet
		NEW SKU	OLD SKU									
2100 W 2V E	**Kylemore**	VV006 04355 368	50 LVREXL 4355	2100	305	15	•	•	2	1,2813	19	65,3463
	Chambord	VV006 04358 368	50 LVREXL 4358	2100	305	15	•	•	2	1,2813	19	65,3463
	Saumur	VV006 04384 368	50 LVREXL 4384	2100	305	15	•	•	2	1,2813	19	65,3463
2100 2V E	**Monte**	VV809 05188 368	50 LVREXL 5188	2100	228	15	•	•	3	1,4364	22	68,9760
	Alhambra	VV809 05183 368	50 LVREXL 5183	2100	228	15	•	•	3	1,4364	22	68,9760
	Bled	VV809 05152 368	50 LVREXL 5152	2100	228	15	•	•	3	1,4364	22	68,9760
	Kantara	VV809 02515 368	50 LVREXL 2515	2100	228	15	•	•	3	1,4364	22	68,9760
	Egmont	VV809 02553 368	50 LVREXL 2553	2100	228	15	•	•	3	1,4364	22	68,9760
	Belvoir	VV809 02594 368	50 LVREXL 2594	2100	228	15	•	•	3	1,4364	22	68,9760
	Montclair	VV809 02557 368	50 LVREXL 2557	2100	228	15	•	•	3	1,4364	22	68,9760
	Windsor	VV809 02683 368	50 LVREXL 2683	2100	228	15	•	•	3	1,4364	22	68,9760
	Fonteneau	VV809 02686 368	50 LVREXL 2686	2100	228	15	•	•	3	1,4364	22	68,9760
	Chantilly	VV809 02599 368	50 LVREXL 2599	2100	228	15	•	•	3	1,4364	22	68,9760







Modern

2400 × 58 × 13 mm
13 pieces/box
± box weight : 21 kg

Scotia

2400 × 19 × 19 mm
80 pieces/box
± box weight : 45 kg

T-Profile

2400 × 34 × 5-15 mm
54 pieces/box
± box weight : 23 kg

Name	SKU Number		SKU Number		SKU Number	
	NEW SKU	OLD SKU	NEW SKU	OLD SKU	NEW SKU	OLD SKU
Kylemore	70MSX 04355 368	70 MS08 4355	70SCX 04355 368	70 SC08 4355	70TMX 04355 368	70 TC08 4355
Chambord	70MSX 04358 368	70 MS08 4358	70SCX 04358 368	70 SC08 4358	70TMX 04358 368	70 TC08 4358
Saumur	70MSX 04384 368	70 MS08 4384	70SCX 04384 368	70 SC08 4384	70TMX 04384 368	70 TC08 4384
Monte	70MSX 05188 368	70 MS08 5188	70SCX 05188 368	70 SC08 5188	70TMX 05188 368	70 TC08 5188
Alhambra	70MSX 05183 368	70 MS08 5183	70SCX 05183 368	70 SC08 5183	70TMX 05183 368	70 TC08 5183
Bled	70MSX 05152 368	70 MS08 5152	70SCX 05152 368	70 SC08 5152	70TMX 05152 368	70 TC08 5152
Kantara	70MSX 02515 368	70 MS08 2515	70SCX 02515 368	70 SC08 2515	70TMX 02515 368	70 TC08 2515
Egmont	70MSX 02553 368	70 MS08 2553	70SCX 02553 368	70 SC08 2553	70TMX 02553 368	70 TC08 2553
Belvoir	70MSX 02594 368	70 MS08 2594	70SCX 02594 368	70 SC08 2594	70TMX 02594 368	70 TC08 2594
Montclair	70MSX 02557 368	70 MS08 2557	70SCX 02557 368	70 SC08 2557	70TMX 02557 368	70 TC08 2557
Windsor	70MSX 02683 368	70 MS08 2683	70SCX 02683 368	70 SC08 2683	70TMX 02683 368	70 TC08 2683
Fonteneau	70MSX 02686 368	70 MS08 2686	70SCX 02686 368	70 SC08 2686	70TMX 02686 368	70 TC08 2686
Chantilly	70MSX 02599 368	70 MS08 2599	70SCX 02599 368	70 SC08 2599	70TMX 02599 368	70 TC08 2599

Technical specifications (IT - SP - PT)

Level of use
Classe d'uso / Clasificación de uso / Classe de utilização
Class 23 / 34 (EN ISO 10874)

Geometrical characteristics
Fantasie geometriche / Características geométricas / Características geométricas
Conform (EN 17539)

Wear resistance
Resistenza all'usura / Resistencia al desgaste / Resistência ao desgaste
Pass 7000 cycles (ISO 24338)

Castor chair resistance
Resistenza alle sedie con ruote / Resistencia a sillas con ruedas / Resistência a cadeira de rodas
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg
Effeto furniture leg / Efecto de la patade un mueble / Efeito da perna do móvel
No visible change (EN 16581)

Residual indentation
Indentazione residua certificata / Huella residual / Recuo residual
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Resistenza alle macchie / Resistencia al manchado / Resistência a manchas
5 (no visible change) (EN 438-2)

Locking strength
Chiusura perfetta con sistema a click / Resistencia a la tracción / Força de encaixe
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Stabilità dimensionale / Estabilidad dimensional / Estabilidade dimensional
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light
Resistenza alla luce / Solidez del color a luz artificial / Resistência da cor à luz
> grade 6 (EN ISO 105-B-02)

Impact sound reduction
Isolamento acustico / Aislamiento acústico / Isolamento acústico
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class
Classe Formaldeide / Emisión formaldehído / Classificação formaldeído
E1 (EN 717-1)

Fire classification
Classe di resistenza al fuoco / Resistencia al fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

Slip resistance
Coefficiente dinamico di attrito / Coeficiente de fricción / Coeficiente de atrito
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Riscaldamento a pavimento / Calefacción por suelo radiante / Aquecimento por piso radiante
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance
Performance elettrostatica / Rendimiento antiestático / Acumulação de cargas eletrostáticas
≤ 5 kV (EN 1815)

Thermal resistance
Resistenza al calore / Aislamiento térmico / Isolamento térmico
0.1099 m^2-K/W (EN 12667)

Technical specifications (FI - SV - NO - DK)

Level of use
Käyttöluokka / Klassificering användningsområde / Bruksklasse / Anvendelsesgrad
Class 23 / 34 (EN ISO 10874)

Geometrical characteristics
Geometriset ominaisuudet / Geometrisk karakteristik / Geometriske kjennetegn / Geometriske egenskaber
Conform (EN 17539)

Wear resistance
Kulutuksenkesto / Slitstyrka / Slitestyrke / Slidstyrke
Pass 7000 cycles (ISO 24338)

Castor chair resistance
Pyörällisen toimistotuolin kesto / Tålighet mot rullhjul / Motstandsdyktighet / Modstandsdygtighed over for hjulstol
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg
Huonekalun jalkojen kesto / Verkan från möbelben / Effekt møbelbein / Virkning af møbelben
No visible change (EN 16581)

Residual indentation
Jäännöspainuma / Beständighet mot intrycksmärken / Motstandsdyktighet mottrykkmerker / Resterende indtryk
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Tahraantumisenkesto / Fläckbeständighet / Motstandsdyktighet mot flekker / Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

Locking strength
Lukituksen vahvuus / Låsningsstyrka / Låsestabilitet / Låsningsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Mittavakaus / Dimensionsstabilitet vid värmepåverkan / Formstabilitet / Dimensionel stabilitet
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light
Valonkesto / Färghärdighet / Lysfasthet / Låsningsstyrke
> grade 6 (EN ISO 105-B-02)

Impact sound reduction
Askeläänen parannusarvo / Ljudisolering / Akustisk isolasjon (lydisolering) / Reduktion af stødlyd
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class
Formaldehydiluokka / Formaldehydemission / Formaldehyd emisjonsgruppe / Formaldehydemissionsklasse
E1 (EN 717-1)

Fire classification
Paloluokka / Flamsäkerhet / Brannklasse / Brandklassificering
Bfl - S1 (EN 13501)

Slip resistance
Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Lattialämmitys / Värmegolv / Gulvvarme /Gulvvarme
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance
Sähköstaattinen varautuminen / Prestanda statisk elektricitet / Elektrostatisk ytelse (antistatisk) / Elektrostatisk ydeevne
≤ 5 kV (EN 1815)

Thermal resistance
Lämmönvastus / Värmemotstånd / Varmebestandighet / Termisk modstandsdygtighed
0.1099 m^2-K/W (EN 12667)

Technical specifications (SK - PL - RU - HU - CZ - LT)

Level of use
Úroveň použitia / Klasa ścieralności / Класс спользования / Európai besorolás / Úroveň použití / Atsparumo klasė
Class 23 / 34 (EN ISO 10874)

Geometrical characteristics
Geometrické parametre / Charakterystyka Geometryczna / геометрические характеристики / Geometriai jellemző / Rozměry / Geometrinės savybės
Conform (EN 17539)

Wear resistance
Odolnosť voči opotrebeniu / Wytrzymałość na zużycie / износостойкость / Kopásállóság / Odolnost proti opotřebení / Atsparumas dilimui
Pass 7000 cycles (ISO 24338)

Castor chair resistance
Odolnosť voči kolieskam na stoličke / Odporność na krzesła obrotowe z kółkami / Стойкость к креслам с роликами / Görgős szék teszt / Odolnost vůči kolečkovým židlým / Atsparumas kėdžių ratukams
Pass 25 000 cycles (ISO 4918)

Effect of furniture leg
Efekt z nôh nábytku / Wpływ nogi meblowej / воздействие мебельных ножек / Bútorlábhatás / Vliv nábytkové nožky / Baldų poveikis
No visible change (EN 16581)

Residual indentation
Trvalá deformácia / Pozostałe wgniecenie / остаточные вмятины / Megmaradó benyomódás / Trvalá deformace / Likęs įdubimas
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Odolnosť voči napúšťaniu farbou / Odporność na barwienie / устойчивость к пятнообразованию / Foltállóság / Odolnost proti vzniku skvrn / Atsparumas dėmėms
5 (no visible change) (EN 438-2)

Locking strength
Pevnosť pripojenia / Wytrzymałość blokowania / прочность крепления / Záróerő / Pevnostzajištění / Blokavimo jėga
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Rozmerová stabilita / Stabilność wymiarowa / Стабильность размеров / Méretstabilitás / Rozměrová stabilita / Matmenų stabilumas
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light
Stálosť farby na svetle / Odporność koloru na światło / устойчивость окраски к свету / Színtartósság / Stálobarevnost na světle / Spalvų atsparumas šviesa
> grade 6 (EN ISO 105-B-02)

Impact sound reduction
Akustická izolácia / Izolacja akustyczna Звукоизоляция / Hangszigetelés / Akustická izolace / Garso slopinimas
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class
Formaldehydová skupina / Emisja formaldehydu / Класс эмиссии формальдегида / Formaldehyd csoport / Formaldehydová skupina / Formaldehyde group
E1 (EN 717-1)

Fire classification
Klasifikácia voči požiaru / klasyfikacja ogniowa / класс огнестойкости / Tűzállósági osztály / Požární klasifikace / Degumo klasifikacija
Bfl - S1 (EN 13501)

Slip resistance
Protišmykovosť / Śliskość / Стойкость к скольжению / Csúszásmentes / Protiskluznost / Slidumo klasė
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Podlahové vykurovanie / Ogrzewanie podłogowe / Полы с подогревом / Padlófűtésre / Podlahové vykurování / Šildomos grindys
Suitable (see: Underfloor Heating Guidelines)

Electrostatic performance
Elektrostatické prevedenie / Akumulacja ładunków elektrostatycznych / Электростатичность / Elektromos feltöltődés / Elektrostatické provedení / Antistatiškumas
≤ 5 kV (EN 1815)

Thermal resistance
Tepelná odolnosť / Odporność cieplna / термостойкость / Hőállóság / Teplotní odolnost / Terminis atsparumas
0.1099 m^2-K/W (EN 12667)

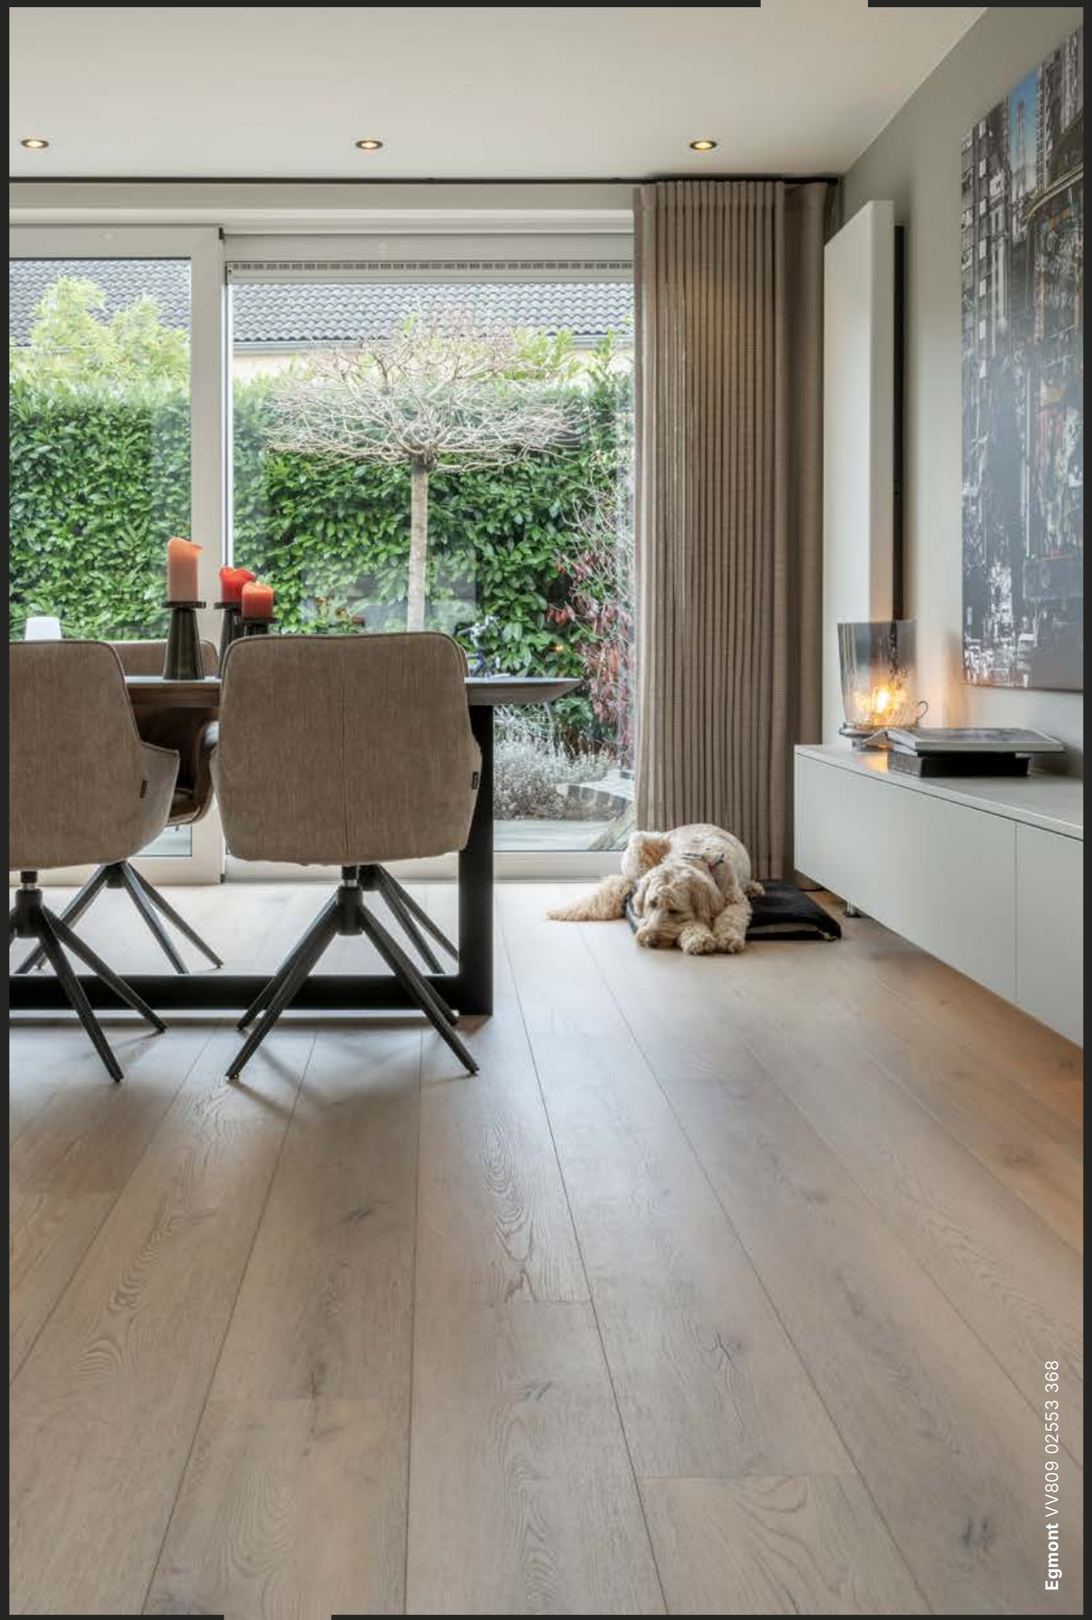

Egmont VV809 02553 368

It’s in our core to adore nature

Our commitments

Choose me once, love me for life
We believe in a world where things last! For a lifetime, and longer. That’s good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.

Breathe healthy air
The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.

Sustainable cork underlay
Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO_2 emissions.

We can prove it
Don’t take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.

Second Life
So you’re changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.

Do your bit for forest conservation
There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.

Coretec®



Coretec® floors are that good, somebody else can re-enjoy it.

Learn how your Coretec® floor gets a second life.

We collect
your existing Coretec® floor after your request

We clean
your floor with Coretec® biological cleaning products at a business who employs people with complex barriers to work

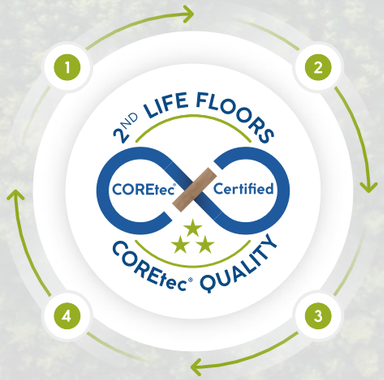

2ND life
you help us lay the foundations to a more durable world

New purpose
your Coretec® floor gets a new purpose in a non-profit organisation or other charity



Coretec®, the natural choice

Lifetime warranty residential

10 year warranty commercial

Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.
Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
Garanti (år) Garantin gäller tillverkningsfel och för tidig utslitning vid normalt användande.
Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vztahuje na vady z výroby a předčasné opotřebení v případě běžného používaní.
Garantija (Metai) Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com

US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF Shaw INDUSTRIES

05-2026 / EN-INT - PS313 00084 368 / The flooring in this document is reproduced as accurately as achievable by printing techniques. Information in this document is subject to change. Value: € 2,50