EN

PRO+PLUS

Where style meets strength



TRUST IN EVERY STEP

TRUST IN EVERY STEP

Coretec®

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.



Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® cleaning products.



Time saving solution

Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.

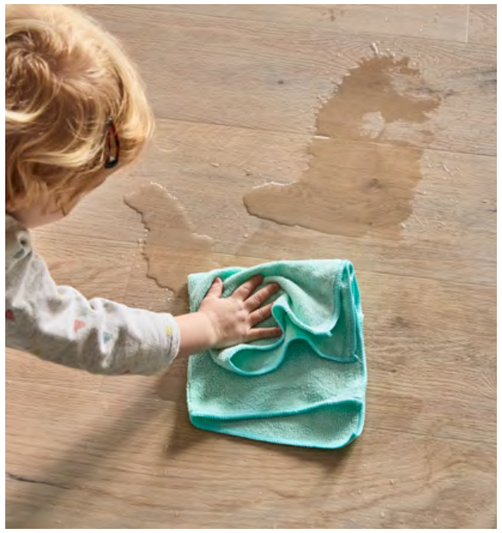

100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a lifetime residential warranty.

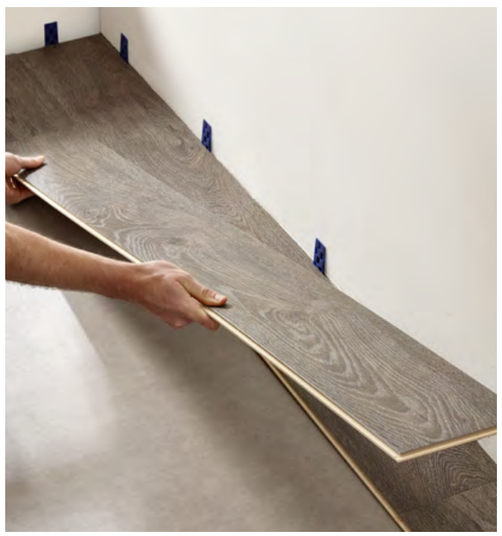

Pro Core® 5 mm

The original 100% waterproof floor, with extra dent & impact resistance

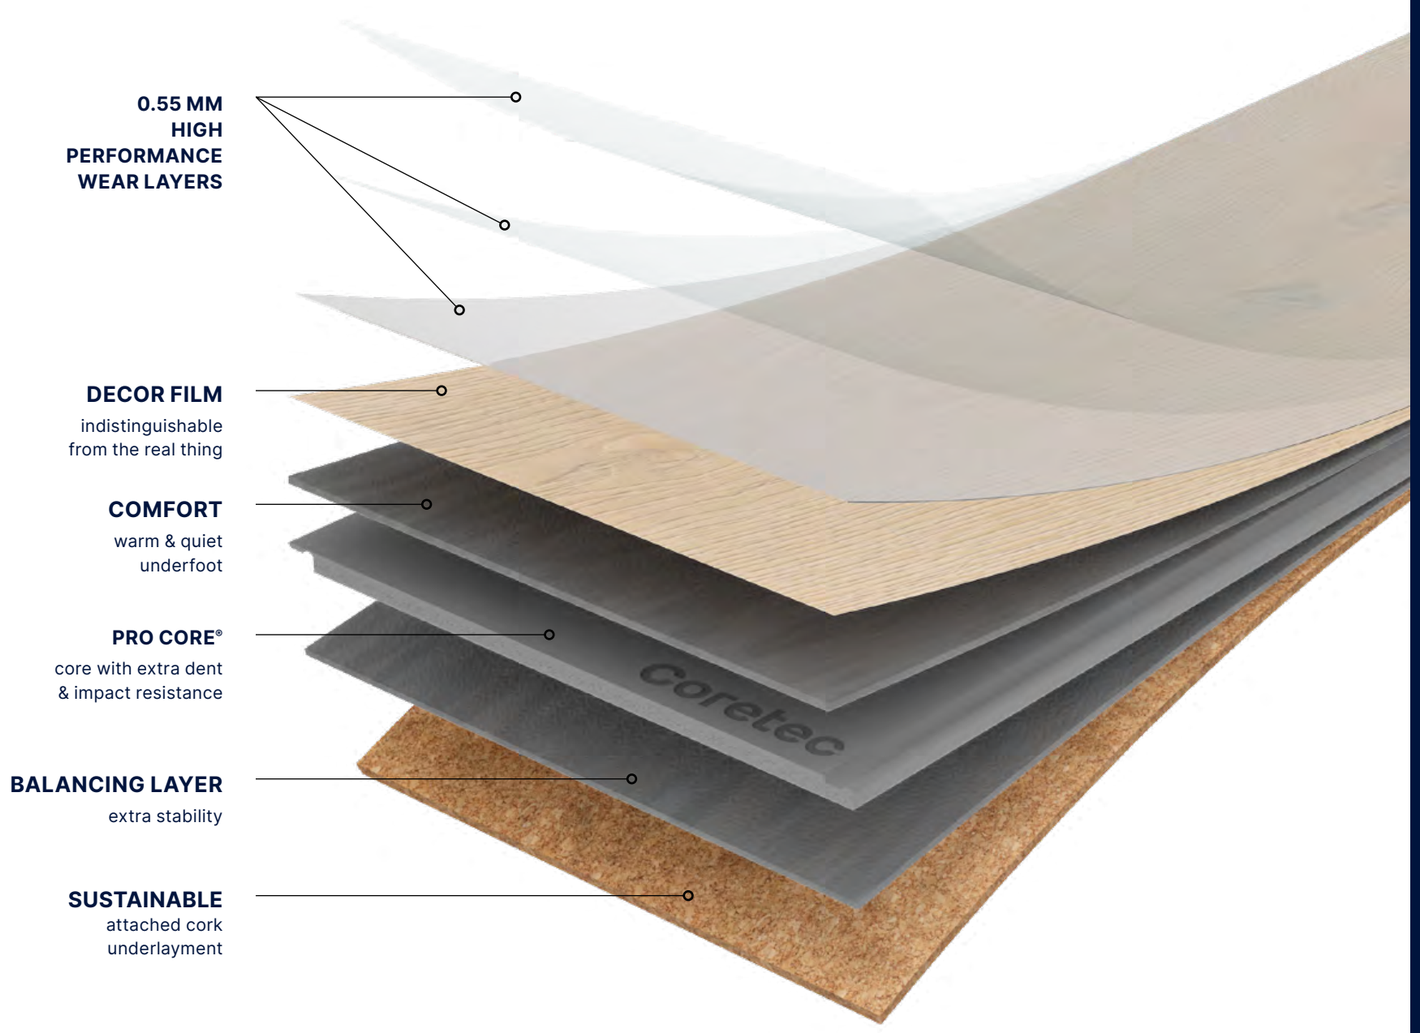

- 100% waterproof
- Extremely stable
- No acclimatisation necessary
- Easy to install
- Installation on any surface
- Reduces noise
- Wear resistant
- Pet proof
- Electrostatic performance
- Ideal for underfloor heating & cooling

Floors for high demands

ProPlus doesn't need intricate designs to make a statement. Its minimalist aesthetic has a unique charm of its own and directs attention to what truly matters: its exceptional durability.

Where style meets strength

PRO PLUS

Coretec



1500 4V

1520 × 183 mm
5,00 mm
0,55 mm
10 pcs
2,78 m²
± 23 kg

1200 MB

1220 × 183 mm
5,00 mm
0,55 mm
12 pcs
2,68 m²
± 22 kg

1200 MB E

1220 × 183 mm
5,00 mm
0,55 mm
12 pcs
2,68 m²
± 22 kg

TILE 4V

610 × 472 mm
5,00 mm
0,55 mm
10 pcs
2,88 m²
± 24 kg





1200 MB series

Comcast

VV441 01201 368
1220 × 183 × 5 mm





1200 MB series

Oriental

VV441 01202 368
1220 × 183 × 5 mm

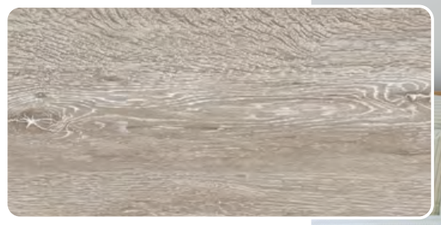

1200 MB series

Kronos

VV441 01203 368
1220 × 183 × 5 mm







1200 MB series

Century

VV441 01204 368
1220 × 183 × 5 mm



1200 MB series

Imperial

VV441 01207 368
1220 × 183 × 5 mm







1200 MB series

Bellagio

VV626 01220 368
1220 × 183 × 5 mm





MULTICOLOUR EFFECT

1200 MB series

Excalibur

VV441 04557 368
1220 × 183 × 5 mm





1200 MB series

Palazzo

VV441 04651 368
1220 × 183 × 5 mm



1200 MB E series

Mandelay

UU002 04352 368
1220 × 183 × 5 mm





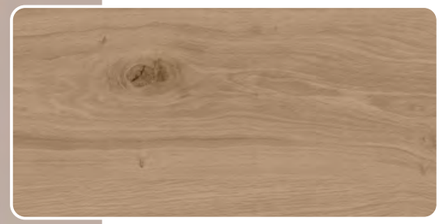

1200 MB E series

Venetian

UU002 04356 368
1220 × 183 × 5 mm



1200 MB E series

Wynn

UU002 04416 368
1220 × 183 × 5 mm



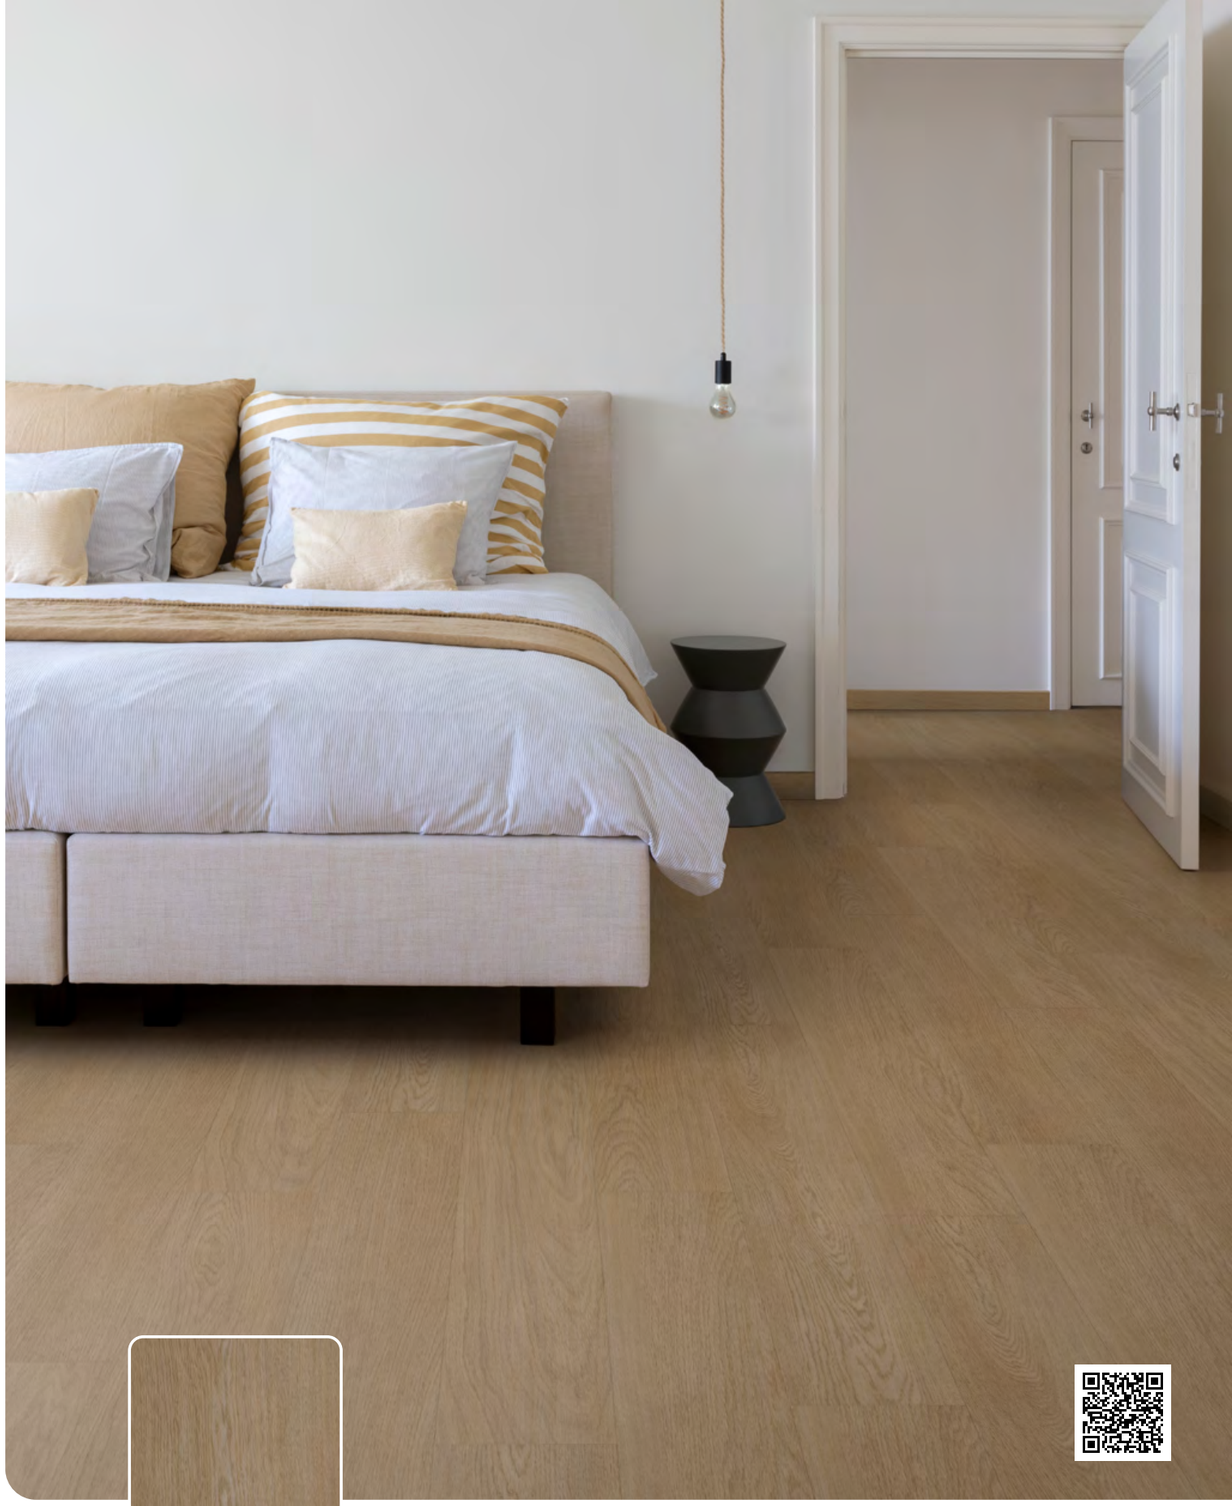



1200 MB E series

Rio

UU002 04455 368
1220 × 183 × 5 mm



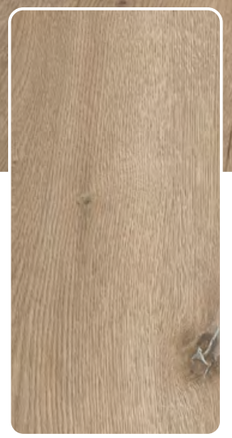

1500 4V series

Piano

VV583 01213 368
1520 × 183 × 5 mm





1500 4V series

Metropol

VV583 01216 368
1520 × 183 × 5 mm

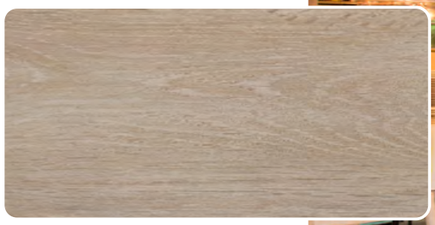

1500 4V series

Mirage

VV583 01218 368
1520 × 183 × 5 mm







1500 4V series

Kingdom

VV583 01228 368
1520 × 183 × 5 mm





TILE 4V series

Cristal

UU001 04191 368
610 × 472 × 5 mm



TILE 4V series

Stratosphere

UU001 04193 368
610 × 472 × 5 mm





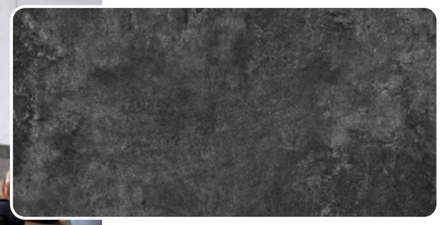

TILE 4V series

Millennium

UU001 04298 368

610 × 472 × 5 mm



TILE 4V series

Tropicana

UU001 04767 368

610 × 472 × 5 mm

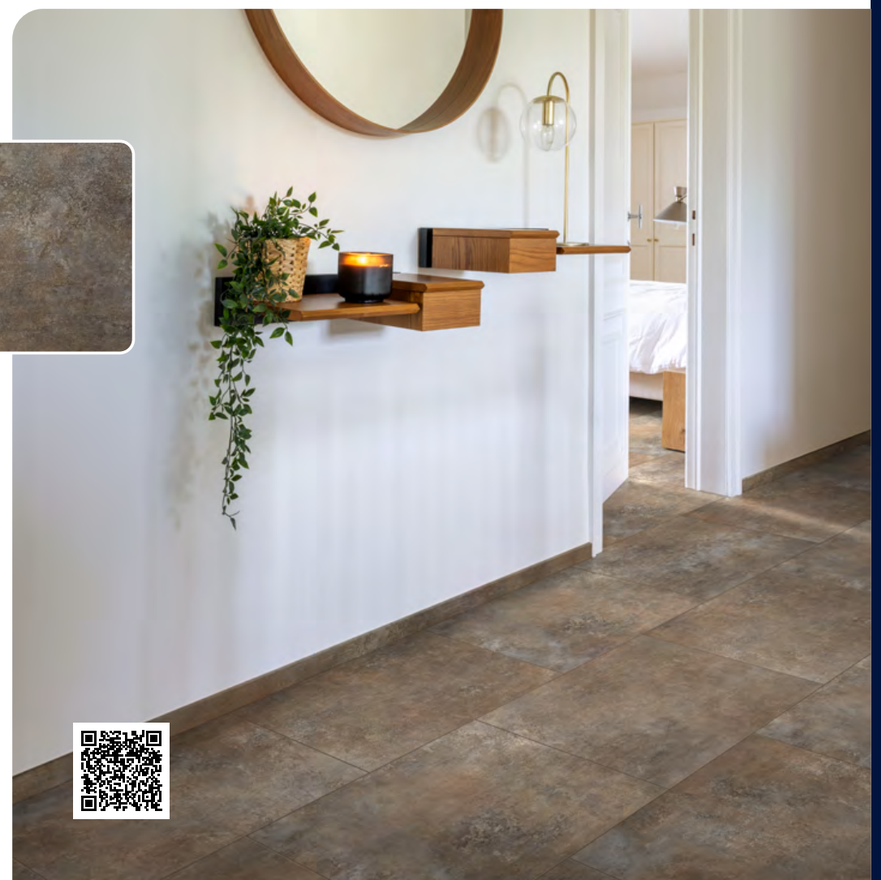

Accessories

Paintable skirtings



4 cm 1 cm 2.3 m

70PSK 23001 368

70 PSK2300-1



6.6 cm 1.3 cm 2.3 m

70PSK 23002 368

70 PSK2300-2



10.2 cm 1.3 cm 2.3 m

70PSK 23003 368

70 PSK2300-3



1.3 cm 1.8 cm 2 m

70PSK 20001 368

70 PSK2000-1



10 cm 2.2 cm 2 m

70PSK 20002 368

70 PSK2000-2

Discover all accessories

Matching design accessories

See page 27

. . . . = reference number



5.8 cm 1.3 cm 2.4 m

70MSP 0 368

70 MS11 . . . .



1.9 cm 1.9 cm 2.4 m

70SCP 0 368

70 SC11 . . . .



5-7 mm 3.4 cm 2.4 m

70TMP 0 368

70 TA11 . . . .

Aluminium profiles

210 Matte black

220 Brushed aluminium

230 Champagne bronze



5-7 mm 3.4 cm 2 m

70ATP 210PC 368 70 ATP 2001 PC

70ATP 220PC 368 70 ATP 2002 PC

70ATP 230PC 368 70 ATP 2003 PC



5-7 mm 4.4 cm 2 m

70ARP 210PC 368 70 ARP 2001 PC

70ARP 220PC 368 70 ARP 2002 PC

70ARP 230PC 368 70 ARP 2003 PC



5-7 mm 2.6 cm 2 m

70AEP 210PC 368 70 AEP 2001 PC

70AEP 220PC 368 70 AEP 2002 PC

70AEP 230PC 368 70 AEP 2003 PC

Installation

Easy installation

Coretec® floors have the easiest install on the market.

Watch our installation video on our website www.coretecfloors.com or scan the QR code.



Maintenance

Coretec® cleaning products

- Stain remover
- Floor cleaning strips



Technical specifications (IT - ES - PT)

Level of use
Classe d'uso / Clasificación de uso / Classe de utilização
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics
Fantasie geometriche / Características geométricas / Características geométricas
Conform (EN 17539)

Wear resistance
Resistenza all'usura / Resistencia al desgaste / Resistência ao desgaste
Pass 5000 cycles (ISO 24338)

Castor chair resistance
Resistenza alle sedie con ruote / Resistencia a sillas con ruedas / Resistência a cadeira de rodas
Pass 25000 cycles (ISO 4918)

Effect of furniture leg
Effeto furniture leg / Efecto de la pata de un mueble / Efeito da perna do móvel
No visible change (EN 16581)

Residual indentation
Indentazione residua certificata / Huella residual / Recuo Residual
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Resistenza alle macchie / Resistencia al manchado / Resistência a manchas
5 (no visible change) (EN 438-2)

Locking strength
Chiusura perfetta con sistema a click / Resistencia a la tracción / Força de encaixe
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Stabilità dimensionale / Estabilidad dimensional / Estabilidade dimensional
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light
Resistenza alla luce / Solidez del color a luz artificial / Resistência da cor à luz
> grade 6 (EN ISO 105-B-02)

Impact sound reduction
Isolamento acustico / Aislamiento acústico / Isolamento acústico
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class
Classe Formaldeide / Emisión formaldehído / Classificação formaldeído
E1 (EN 717-1)

Fire classification
Classe di resistenza al fuoco / Resistencia al fuego / Classificação de Fogo
Bfl - S1 (EN 13501)

Slip resistance
Coefficiente dinamico di attrito / Coeficiente de fricción / Coeficiente de atrito
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Riscaldamento a pavimento / Calefacción por suelo radiante / Aquecimento por piso radiante
Suitable (see: Underfloor heating guidelines)

Electrostatic performance
Performance elettrostatica / Rendimiento antiestático / Acumulação de cargas eletrostáticas
≤ 2 kV (EN 1815)

Thermal resistance
Resistenza al calore / Aislamiento térmico / Isolamento térmico
0.0318 m^2-K/W (EN 12667)

Technical specifications (FI - SV - NO - DK)

Level of use
Käyttöluokka / Klassificering användningsområde / Bruksklasse / Anvendelsesgrad
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics
Geometriset ominaisuudet / Geometrisk karakteristik / Geometriske kjennetegn / Geometriske egenskaber
Conform (EN 17539)

Wear resistance
Kulutuksenkesto / Slitstyrka / Slitestyrke / Slidstyrke
Pass 5000 cycles (ISO 24338)

Castor chair resistance
Pyörällisen toimistotuolin kesto / Tålighet mot rullhjul / Motstandsdyktighet / Modstandsdygtighed over for hjulstol
Pass 25000 cycles (ISO 4918)

Effect of furniture leg
Huonekalun jalkojen kesto / Verkan från möbelben / Effekt møbelbein / Virkning af møbelben
No visible change (EN 16581)

Residual indentation
Jäännöspainuma / Beständighet mot intrycksmärken / Motstandsdyktighet mot trykkmerker / Resterende indtryk
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Tahraantumisenkesto / Fläckbeständighet /Motstandsdyktighet mot flekker / Modstandsdygtighed over for pletter
5 (no visible change) (EN 438-2)

Locking strength
Lukituksen vahvuus / Låsningsstyrka / Låsestabilitet / Låsningsstyrke
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Mittavakaus / Dimensionsstabilitet vid värmepåverkan / Formstabilitet / Dimensionel stabilitet
Pass ≤ 0.25% (EN ISO 23999)

colour fastness to light
Valonkesto / Färghärdighet / Lysfasthet / Låsningsstyrke
> grade 6 (EN ISO 105-B-02)

impact sound reduction
Askeläänen parannusarvo / Ljudisolering /Akustisk isolasjon (lydisolering) / Reduktion af stødlyd
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

formaldehyde emission class
Formaldehydiluokka / Formaldehydemission /Formaldehyd emisjonsgruppe / Formaldehydemissionsklasse
E1 (EN 717-1)

fire classification
Paloluokka / Flamsäkerhet / Brannklasse / Brandklassificering
Bfl - S1 (EN 13501)

slip resistance
Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Lattialämmitys / Värmegolv / Gulvvarme / Gulvvarme
Suitable (see: Underfloor heating guidelines)

electrostatic performance
Sähköstaattinen varautuminen / Prestanda statisk elektricitet / Elektrostatisk ytelse (antistatisk) / Elektrostatisk ydeevne
≤ 5 kV (EN 1815)

thermal resistance
Lämmönvastus / Värmemotstånd / Varmebestandighet / Termisk modstandsdygtighed
0.0318 m^2-K/W (EN 12667)

Technical specifications (SK - PL - RU - HU - CZ - LT)

Level of use
Úroveň použitia / Klasa ścieralności / Класс использования / Európai besorolás / Úroveň použití / Atsparumo klasė
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics
Geometrické parametre / Charakterystyka Geometryczna / геометрические характеристики / Geometriai jellemző / Rozměry / Geometrinės savybės
Conform (EN 17539)

Wear resistance
Odolnosť voči opotrebeniu / Wytrzymałość na zużycie / износостойкость / Kopásállóság / Odolnost proti opotřebení / Atsparumas dilimui
Pass 5000 cycles (ISO 24338)

Castor chair resistance
Odolnosť voči kolieskam na stoličke / Odporność na krzesła obrotowe z kółkami / Стойкость к креслам с роликами / Görgős szék teszt / Odolnost vůči kolečkovým židlým / Atsparumas kėdžių ratukams
Pass 25000 cycles (ISO 4918)

Effect of furniture leg
Efekt z nôh nábytku / Wpływ nogi meblowej / воздействие мебельных ножек / Bútorlábhatás / Vliv nábytkové nožky / Baldų poveikis
No visible change (EN 16581)

Residual indentation
Trvalá deformácia / Pozostałe wgniecenie / остаточные вмятины / Megmaradó benyomódás / Trvalá deformace / Likęs įdubimas
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining
Odolnosť voči napúšťaniu farbou / Odporność na barwienie / устойчивость к пятнообразованию / Foltállóság / Odolnost proti vzniku skvrn / Atsparumas dėmėms
5 (no visible change) (EN 438-2)

Locking strength
Pevnosť pripojenia / Wytrzymałość blokowania / прочность крепления / Záróerő / Pevnostzajištění / Blokavimo jėga
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability
Rozmerová stabilita / Stabilność wymiarowa / Стабильность размеров / Méretstabilitás /Rozměrová stabilita / Matmenų stabilumas
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light
Stálosť farby na svetle / Odporność koloru na światło / устойчивость окраски к свету / Színtartósság / Stálobarevnost na světle / Spalvų atsparumas šviesa
> grade 6 (EN ISO 105-B-02)

Impact sound reduction
Akustická izolácia / Izolacja akustyczna Звукоизоляция / Hangszigetelés / Akustická izolace / Garso slopinimas
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class
Formaldehydová skupina / Emisja formaldehydu /Класс эмиссии формальдегида / Formaldehyd csoport / Formaldehydová skupina / Formaldehyde group
E1 (EN 717-1)

Fire classification
Klasifikácia voči požiaru / klasyfikacja ogniowa / класс огнестойкости / Tűzállósági osztály / Požární klasifikace / Degumo klasifikacija
Bfl - S1 (EN 13501)

Slip resistance
Protišmykovosť / Śliskość / Стойкость к скольжению / Csúszásmentes / Protiskluznost / Slidumo klasė
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating
Podlahové vykurovanie / Ogrzewanie podłogowe / Полы с подогревом / Padlófűtésre / Podlahové vykurování / Šildomos grindys
Suitable (see: Underfloor heating guidelines)

Electrostatic performance
Elektrostatické prevedenie / Akumulacja ładunków elektrostatycznych / Электростатичность / Elektromos feltöltődés / Elektrostatické provedení / Antistatiškumas
≤ 2 kV (EN 1815)

Thermal resistance
Tepelná odolnosť / Odporność cieplna / термостойкость / Hőállóság / Teplotní odolnost / Terminis atsparumas
0.0318 m^2-K/W (EN 12667)



Series	Name	SKU Number		Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M² / box	± Weight box (kg)	M² / pallet
		NEW SKU	OLD SKU									
1200 MB	**Comcast**	VV441 01201 368	50 RLV 1201	1220	183	5			12	2,6756	22	147,1580
	Oriental	VV441 01202 368	50 RLV 1202	1220	183	5			12	2,6756	22	147,1580
	Kronos	VV441 01203 368	50 RLV 1203	1220	183	5			12	2,6756	22	147,1580
	Century	VV441 01204 368	50 RLV 1204	1220	183	5			12	2,6756	22	147,1580
	Imperial	VV441 01207 368	50 RLV 1207	1220	183	5			12	2,6756	22	147,1580
	Bellagio	VV626 01220 368	50 RLV 1220	1220	183	5			12	2,6756	22	147,1580
	Excalibur	VV441 04557 368	50 RLV 4557	1220	183	5			12	2,6756	22	147,1580
	Palazzo	VV441 04651 368	50 RLV 4651	1220	183	5			12	2,6756	22	147,1580
1200 MB E	**Mandelay**	UU002 04352 368	50 RLVR 4352	1220	183	5		●	12	2,6756	22	147,1580
	Venetian	UU002 04356 368	50 RLVR 4356	1220	183	5		●	12	2,6756	22	147,1580
	Wynn	UU002 04416 368	50 RLVR 4416	1220	183	5		●	12	2,6756	22	147,1580
	Rio	UU002 04455 368	50 RLVR 4455	1220	183	5		●	12	2,6756	22	147,1580
1500 4V	**Piano**	VV583 01213 368	50 RLVE 1213	1520	183	5	●		10	2,7797	23	138,9850
	Metropol	VV583 01216 368	50 RLVE 1216	1520	183	5	●		10	2,7797	23	138,9850
	Mirage	VV583 01218 368	50 RLVE 1218	1520	183	5	●		10	2,7797	23	138,9850
	Kingdom	VV583 01228 368	50 RLVE 1228	1520	183	5	●		10	2,7797	23	138,9850
TILE 4V	**Cristal**	UU001 04191 368	50 RLVE 4191	610	472	5	●		10	2,8769	24	149,5988
	Stratosphere	UU001 04193 368	50 RLVE 4193	610	472	5	●		10	2,8769	24	149,5988
	Millennium	UU001 04298 368	50 RLVE 4298	610	472	5	●		10	2,8769	24	149,5988
	Tropicana	UU001 04767 368	50 RLVE 4767	610	472	5	●		10	2,8769	24	149,5988



Modern

2400 × 58 × 13 mm
13 pieces/box
± box weight : 21 kg



Scotia

2400 × 19 × 19 mm
80 pieces/box
± box weight : 45 kg



T-Profile

2400 × 34 × 8-12 mm
54 pieces/box
± box weight : 23 kg

Name	SKU Number		SKU Number		SKU Number	
	NEW SKU	OLD SKU	NEW SKU	OLD SKU	NEW SKU	OLD SKU
Comcast	70MSP 01201 368	70 MS11 1201	70SCP 01201 368	70 SC11 1201	70TMP 01201 368	70 TB11 1201
Oriental	70MSP 01202 368	70 MS11 1202	70SCP 01202 368	70 SC11 1202	70TMP 01202 368	70 TB11 1202
Kronos	70MSP 01203 368	70 MS11 1203	70SCP 01203 368	70 SC11 1203	70TMP 01203 368	70 TB11 1203
Century	70MSP 01204 368	70 MS11 1204	70SCP 01204 368	70 SC11 1204	70TMP 01204 368	70 TB11 1204
Imperial	70MSP 01207 368	70 MS11 1207	70SCP 01207 368	70 SC11 1207	70TMP 01207 368	70 TB11 1207
Bellagio	70MSP 01220 368	70 MS11 1220	70SCP 01220 368	70 SC11 1220	70TMP 01220 368	70 TB11 1220
Excalibur	70MSP 04557 368	70 MS11 4557	70SCP 04557 368	70 SC11 4557	70TMP 04557 368	70 TB11 4557
Palazzo	70MSP 04651 368	70 MS11 4651	70SCP 04651 368	70 SC11 4651	70TMP 04651 368	70 TB11 4651
Mandelay	70MSP 04352 368	70 MS11 4352	70SCP 04352 368	70 SC11 4352	70TMP 04352 368	70 TB11 4352
Venetian	70MSP 04356 368	70 MS11 4356	70SCP 04356 368	70 SC11 4356	70TMP 04356 368	70 TB11 4356
Wynn	70MSP 04416 368	70 MS11 4416	70SCP 04416 368	70 SC11 4416	70TMP 04416 368	70 TB11 4416
Rio	70MSP 04455 368	70 MS11 4455	70SCP 04455 368	70 SC11 4455	70TMP 04455 368	70 TB11 4455
Piano	70MSP 01213 368	70 MS11 1213	70SCP 01213 368	70 SC11 1213	70TMP 01213 368	70 TB11 1213
Metropol	70MSP 01216 368	70 MS11 1216	70SCP 01216 368	70 SC11 1216	70TMP 01216 368	70 TB11 1216
Mirage	70MSP 01218 368	70 MS11 1218	70SCP 01218 368	70 SC11 1218	70TMP 01218 368	70 TB11 1218
Kingdom	70MSP 01228 368	70 MS11 1228	70SCP 01228 368	70 SC11 1228	70TMP 01228 368	70 TB11 1228
Cristal	70MSP 04191 368	70 MS11 4191	70SCP 04191 368	70 SC11 4191	70TMP 04191 368	70 TB11 4191
Stratosphere	70MSP 04193 368	70 MS11 4193	70SCP 04193 368	70 SC11 4193	70TMP 04193 368	70 TB11 4193
Millennium	70MSP 04298 368	70 MS11 4298	70SCP 04298 368	70 SC11 4298	70TMP 04298 368	70 TB11 4298
Tropicana	70MSP 04767 368	70 MS11 4767	70SCP 04767 368	70 SC11 4767	70TMP 04767 368	70 TB11 4767

It’s in our core to adore nature

Our commitments

Choose me once, love me for life
We believe in a world where things last! For a lifetime, and longer. That’s good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.

Breathe healthy air
The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.

Sustainable cork underlay
Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO_2 emissions.

We can prove it
Don’t take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.

Second Life
So you’re changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.

Do your bit for forest conservation
There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.

Coretec®

Coretec® floors are that good, somebody else can re-enjoy it.

Learn how your Coretec® floor gets a second life.

We collect
your existing Coretec® floor after your request

We clean
your floor with Coretec® biological cleaning products at a business who employs people with complex barriers to work

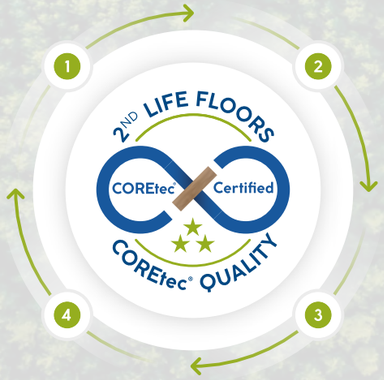

2ND life
you help us lay the foundations to a more durable world

New purpose
your Coretec® floor gets a new purpose in a non-profit organisation or other charity



Lifetime warranty residential

10 YEARS
10 year warranty commercial

Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.
Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
Garanti (år) Garantin gäller tillverkningsfel och för tidig utslitning vid normalt användande.
Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vztahuje na vady z výroby a předčasné opotřebení v případě běžného používaní.
Garantija (Metai) Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com

US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF Shaw INDUSTRIES

05-2026 / EN-INTL - PS313 00114 368 / The flooring in this document is reproduced as accurately as achievable by printing techniques. Information in this document is subject to change. Value: € 1,50